













OPTOELECTRONIC INSTRUMENTS AND SYSTEMS FOR  
GEOMETRIC QUANTITIES MEASUREMENT

# PRODUCT CATALOG

# 2020

	DISPLACEMENT AND POSITION MEASUREMENT		GAP MEASUREMENT
	THICKNESS AND WIDTH MEASUREMENT		PROFILE MEASUREMENT
	OUTER DIAMETER AND PROFILE MEASUREMENT		LEVEL MEASUREMENT
	INNER DIAMETER AND PROFILE MEASUREMENT		2D MEASUREMENT
	VIBRATION AND RUN-OUT MEASUREMENT		3D MEASUREMENT
	STRAIGHTNESS AND FLATNESS MEASUREMENT		MACHINE VISION SYSTEMS



The parent company, Scientific and Production Company «RIFTEK» was founded in 1993. The enterprise specializes in development and fabrication of optoelectronic instruments for measuring of geometrical quantities.

The group also includes:

Enterprise «RIFTEK TECHNO» — manufacturing of mechanical parts and components for the parent company, contract manufacturing;

Enterprise «RIFTEK-SMT» — automated assembling of printed circuit boards (PCB), contract manufacturing;

Enterprise «RIFTEK-Systems» — assembly unit in Russia.

The basic product line includes:

- laser triangulation position sensors;
- 2D and 3D laser scanners;
- absolute linear encoders;
- optical micrometers;
- hardware and software system for welding robots;
- specialized systems for measuring dimensions, displacements and distances, thickness, diameter, etc.;
- measurement instruments for railway transport;
- video processing FPGA IP-cores and hardware;
- machine vision systems.

RIFTEK products are delivered in more than 70 countries. Company representative offices operate in 45 countries.

RIFTEK company is certified according to ISO 9001:2015 in the field of management of quality of design and manufacture of optoelectronic instrumentation.

**We offer integrated solution to control and automation problems — from sensing devices to multifunctional measuring and control systems.**



# LASER TRIANGULATION SENSORS, RF60x SERIES


## PURPOSE

Contactless dimensions, surface profile, deformation, vibration measurement, sorting, sensing presence or absence, positional checking, bulk materials and liquids level measurement.

## OPERATION

Sensor operation is based on the principle of optical triangulation.

Radiation of a semiconductor laser is focused by an objective on an object. The radiation scattered at the object is collected on the CMOS array by the input lens. Object motion causes a corresponding motion of the image. Built-in signal processor calculates the distance to the object according to the light spot image position on the CMOS array.

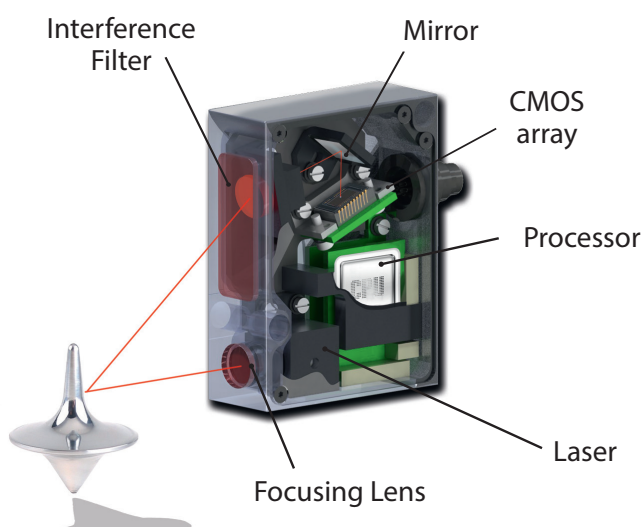


## MAIN FEATURES

- Measuring ranges from 2 to 2500 mm
- $\pm 1 \mu\text{m}$  accuracy
- Sampling rate up to 160 kHz
- RS232/RS485/Ethernet/CAN/ CANopen +4...20 mA/0...10V/ModbusRTU
- Binocular sensors for laser scanning
- Binary and ASCII data formats
- Sensors with BLUE lasers to control high temperature, mirrored and semitransparent objects
- Sensors with IR lasers
- Mutual synchronization of the sensors (master-slave) for multi-axis measurement tasks
- Service Software for parameter setting and results visualization
- Free SDK and examples for Windows, Linux, .NET, MATLAB, LabVIEW

## MODELS

- RF603 — universal sensors
- RF603HS — high speed sensors
- RF600 / RF600HS — sensors with increased base distance and large measurement range. High speed sensors
- RF605 — compact sensors
- RF602 — super compact sensors
- RF607 — high-precision high-speed sensors
- RF609 / RF609Rt — laser probes for inner surface control

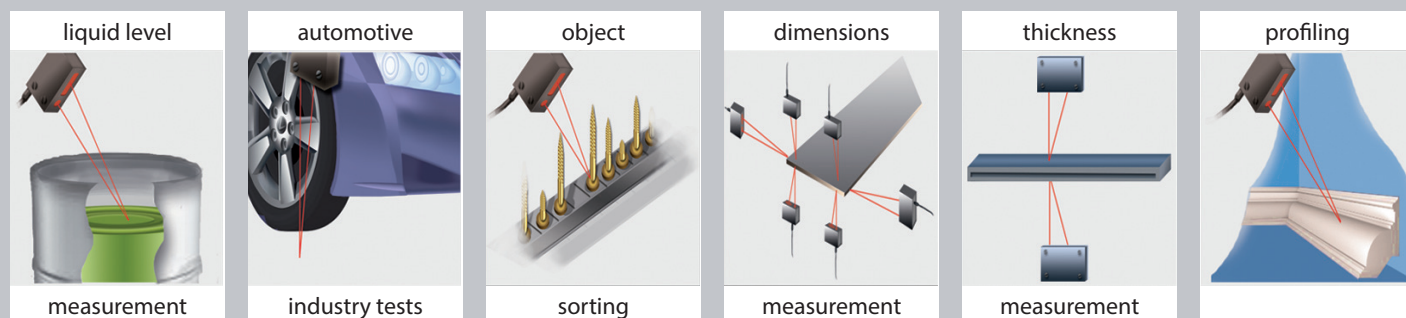

PARAMETER		VALUE
Output interface	digital	RS232 (max. 460.8 kbit/s) or RS485 (max. 921.6 kbit/s) or RS232 and CAN V2.0B (max 1Mbit/s) or Ethernet and (RS32 or RS485)
	analog	
Synchronization input		4...20 mA ( $\leq 500 \Omega$ load) or 0...10 V
Logic output		2.4 – 5 V (CMOS, TTL)
Power supply, V		programmed functions, NPN: 100 mA max; 40 V max for output
Power consumption, W		9 ...36
Environment resistance	Enclosure rating	1.5..2
	Vibration	IP67 ( for the sensors with cable connector only)
	Shock	20g/10...1000Hz, 6 hours, for each of XYZ axes
	Operation temperature, °C	30 g / 6 ms
	Permissible ambient light, lx	-10...+60, (-30...+60 for the sensors with built-in heater), (-30...+120 for the sensors with built-in heater and air cooling housing)
	Relative humidity	>30000
Storage temperature, °C		5-95% (no condensation)
Housing material		-20...+70
		aluminum

# LASER TRIANGULATION SENSORS, RF60x SERIES

## UNIVERSAL LASER SENSORS


## RF603 Series

- Varied diode powers
- Binocular sensors
- Available with Red, Blue or IR laser diodes
- Accuracy  $\pm 0.05\%$  working range




### OPTIONS

- Protective housing with air and water cooling
- Custom versions with non-standard base, range or housing shape
- Special version for use in high vibration conditions
- Special flexible cable for robotic applications
- Variants with round and elliptical spot

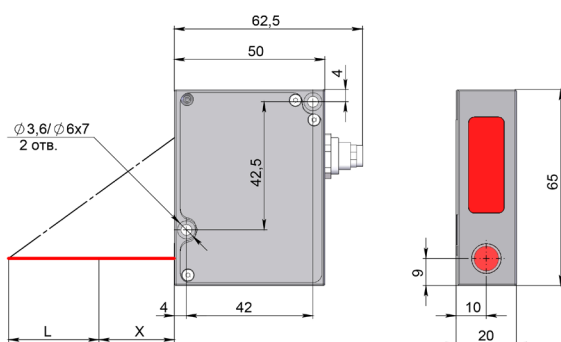

### SOFTWARE

- Setting sensor parameters
- Receiving, storage, visualization
- Speed and acceleration calculation

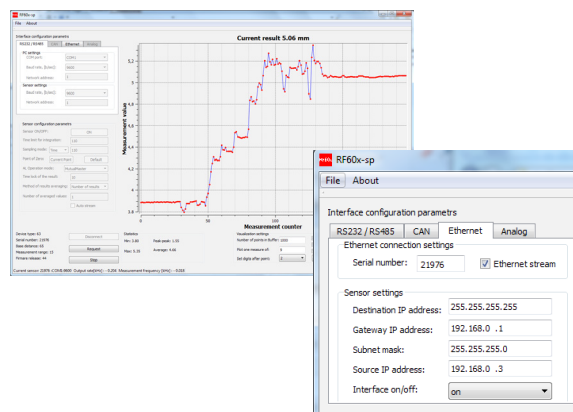


RF603-		R-X/4	X/2	X/5	X/10	X/15	X/25	X/30	X/50	X/100	X/250	X/500	X/750	X/1000	X/1250	
Base distance X, mm		39	15	15	15, 25 60	15, 30 65	25, 45 80	35, 55 95	45, 65 105	60, 90 140	80	125	145	245	260	
Measurement range, mm		4	2	5	10	15	25	30	50	100	250	500	750	1000	1250	
Linearity, %		±0.05 of the range												±0.1		
Resolution, %		0.01 of the range (for the digital output only)												0.02		
Temperature drift		0.02% of the range/°C														
Max. measurement frequency, Hz		9400														
Light source		red semiconductor laser, 660 nm wavelength or UV semiconductor laser 405 nm wavelength (BLUE version)														
Light source	model	RF603														
	output power	≤0.2	≤3 mW													
	laser safety Class	1	3R (IEC60825-1)													
	model		RF603L													
	output power		≤0.95 mW													
	laser safety Class		2 (IEC60825-1)													
	model												RF603P			
	output power												≤20 mW			
laser safety Class		3B (IEC60825-1)														
Weight (without cable)		100														
Note 1: RF603-R-39/4 sensor is designed to use with mirror surfaces and glass.																

Note 1: RF603-R-39/4 sensor is designed to use with mirror surfaces and glass.

## HIGH SPEED SENSORS

## RF603HS Series

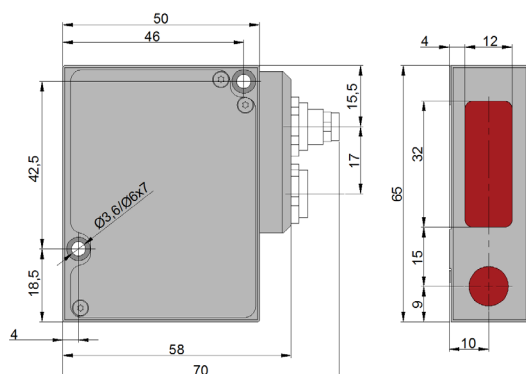

- Universal high-speed compact laser sensors
- Sampling rate up to 160 kHz
- Available with Red and Blue laser diodes
- Ideal for registration of high speed events and vibration measurement




# LASER TRIANGULATION SENSORS, RF60x SERIES

RF603HS-	X/2	X/5	X/10	X/15	X/25	X/30	X/50	X/100	X/250	X/500	X/750	
Base distance X, mm	15	15	15, 25 60	15, 30 65	25, 45 80	35, 55 95	45, 65 105	60, 90 140	80	125	145	
Measurement range, mm	2	5	10	15	25	30	50	100	250	500	750	
Max. measurement frequency, kHz	60, 120, 160									60 or 120	60	
Linearity, % of the range	±0.1 (60 kHz), ±0.2 (120 kHz), ±0.3 (160 kHz)											
Resolution, % of the range	0.01 (60 kHz), 0.02 (120 kHz), 0.03 (160 kHz)											
Temperature drift	0.02% of the range/°C											
Light source	red semiconductor laser (660 nm wavelength) or blue semiconductor laser (405 nm wavelength)											
Output power	≤4.8 mW								≤20 mW		≤50 mW	
Laser safety Class	3R (IEC/EN 60825-1:2014)								3B (IEC/EN 60825-1:2014)			

## LARGE-BASE AND LONG RANGE SENSORS

## RF600 Series


- High-precision measurement of the position of remote objects
- High-speed (70 kHz) sensors

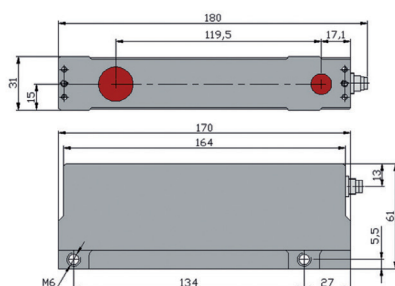

RF600-	X/10	X/30	X/40	X/100	X/250	X/500	X/600	X/1000	X/1000	X/1500	X/2000	X/2500	X/20	X/50
Base distance X, mm	230	300	330	500	230	300, 1000	230	1300	380	390	410	420	540	535
Measurement range, mm	10	30	40	100	250	500	600	1000	1000	1500	2000	2500	20	50
Max. measurement frequency	9.4 kHz, 70 kHz													
Linearity, % of the range	±0.1										±0.2		±0.05	
Resolution, % of the range	0.01 of the range (digital output only)										0.03		0.01	
Temperature drift	0.02% of the range/°C													
Light source	red semiconductor laser, 660 nm wavelength or UV semiconductor laser 405 nm wavelength (BLUE version)													
Output power	≤4.8 mW										≤20 mW			
Laser safety Class	3R (IEC60825-1)										3B (IEC60825-1)			
Weight (without cable)	500						2000							

## COMPACT LASER SENSORS

## RF605 Series

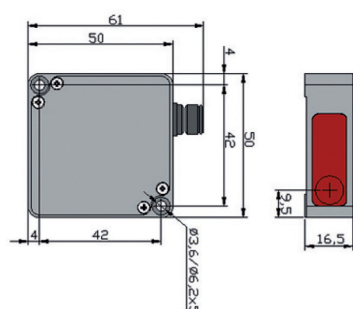



RF605-	25/50	45/100	65/250	105/500
Base distance X, mm	25	45	65	105
Measurement range, mm	50	100	250	500
Max. measurement frequency	2000 Hz			
Linearity, % of the range	$\pm 0.1$			
Resolution, % of the range	0.01 (digital output only)			
Temperature drift	0.02% of the range/°C			
Light source	red semiconductor laser, 660 nm wavelength			
Output power	$\leq 0.95$ mW			
Laser safety Class	2 (IEC60825-1)			
Weight (without cable)	60			

# LASER TRIANGULATION SENSORS, RF60x SERIES

## SUPER COMPACT LASER SENSORS

## RF602 Series

- Unique combination of dimensions, performance and operating ranges

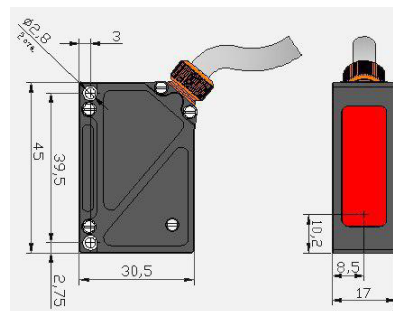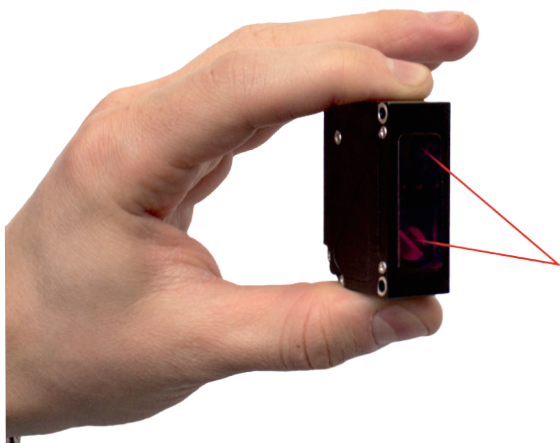

RF602-	20/10	20/25	30/50	50/100	65/250	105/500
Base distance X, mm	20	20	30	50	65	105
Measurement range, mm	10	25	50	100	250	500
Max. measurement frequency	9400 Hz					
Linearity, % of the range	±0.05					
Resolution, % of the range	0.01 (digital output only)					
Temperature drift	0.02% of the range/°C					
Light source	red semiconductor laser, 660 nm wavelength or UV semiconductor laser 405 nm wavelength (BLUE version)					
Output power, mW	≤0.95 mW					
Laser safety Class	2 (IEC60825-1)					
Weight (without cable), gram	40					

## SPECIALIZED LASER SENSORS FOR PAVEMENT PROFILE AND TEXTURE MEASUREMENT

## RF60i Series

- Accuracy ± 0.03% of working range
- Sampling rate up to 70 kHz

MODEL	SPECIFIC FEATURES	ASSIGNMENT	
RF603P-125/500 RF603P-245/1000	<ul style="list-style-type: none"> <li>high resistance to solar radiation</li> <li>stable operation on wet surfaces</li> <li>70 kHz operating frequency</li> </ul>	Pavement profile measurement	
RF607-195/500	<ul style="list-style-type: none"> <li>70 kHz operating frequency</li> <li>round laser spot, diameter &lt;1 mm</li> </ul>		
RF607-210/230 RF607-230/250	<ul style="list-style-type: none"> <li>70 kHz operating frequency</li> <li>round laser spot, diameter &lt;0.8 mm</li> <li>accuracy ±0.03% of the range</li> </ul>	Pavement roughness (texture) measurement	
RF603Txt-30/30	<ul style="list-style-type: none"> <li>reduced triangulation angle</li> <li>round laser spot, diameter &lt;60 μm</li> <li>simultaneously obtaining profile and image of the surface</li> </ul>		




# LASER TRIANGULATION PROBES, RF60x SERIES

## LASER TRIANGULATION PROBES

## RF609 and RF609Rt Series

- Smallest triangulation sensor on the market
- Probe diameter — from 8.5 mm
- Measured inner diameter - from 9 mm
- Accuracy - from  $\pm 2 \mu\text{m}$
- Sampling rate - up to 9.4 kHz
- Probes with BLUE laser to control reflecting and semitransparent objects
- Probes with built-in slip ring


Contactless measurement of inner diameter, ovality, coaxiality, cylindricity and shape of holes, tubes, hosepipes, bushes, gun barrels, etc.

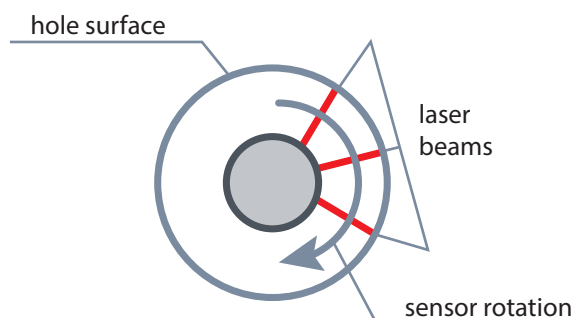



The probe is inserted into the hole and probe or sample is driven in rotation. Laser triangulation sensor built in the probe measures the distance to the hole wall synchronously with the rotation angle. The set of the polar surface coordinates allows to calculate the required parameters. Additional linear translation allows to build 3D model of the hole.

Parameter (Rt version – sensor with built-in sleep ring)	RF609 (609Rt)- 9/19	RF609 (609Rt)- 16/48
Measured diameters, mm	9...19	16...48
Diameter measurement accuracy, μm	±2	±10
Sensor measurement frequency, Hz	9400	
Rotational speed for Rt version, no more rps	4	
Laser safety Class	2 (IEC60825-1)	
Interface	RS232 or RS485 or Ethernet	
Synchronization input: trigger, A-B encoder, V	2.4-24	
Minimal distance to the hole bottom, mm	20	
Hole depth, mm	by request	
Power supply, V	9...36	
Power consumption, W	1.5-2	
* for other measured diameters and hole depth ranges please consult factory		

### RF609-9/19

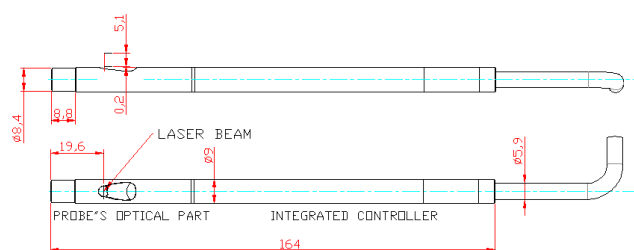

### RF609Rt-9/19

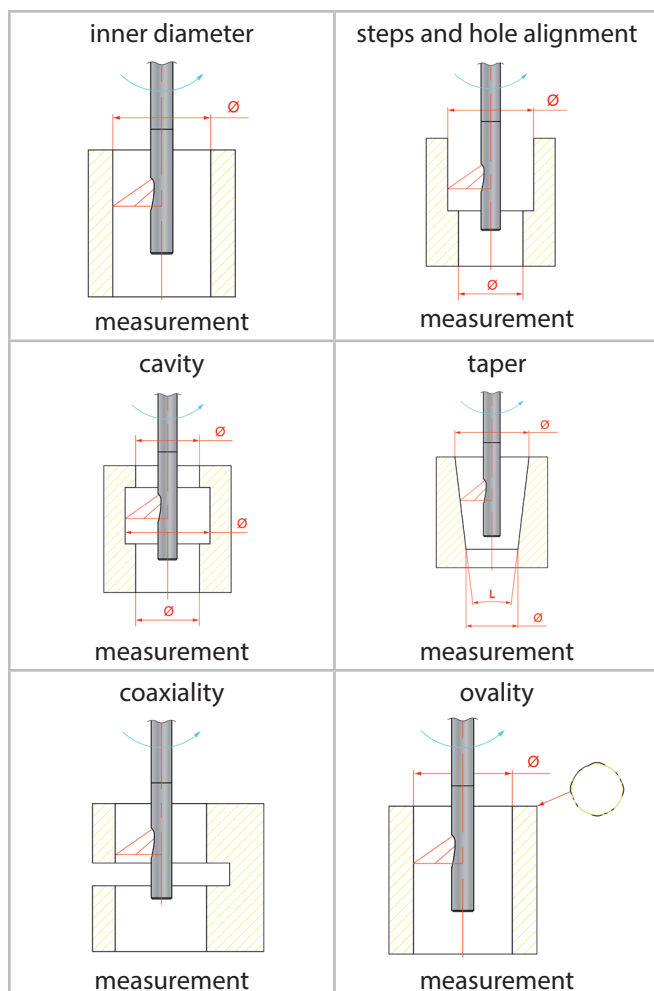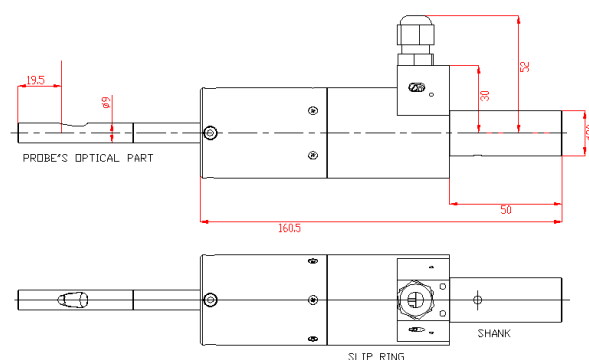


# ABSOLUTE LINEAR ENCODERS, RF25x SERIES

## ABSOLUTE LINEAR POSITION SENSORS (ABSOLUTE LINEAR ENCODERS)


## RF25X Series

Absolute linear encoders are designed for measuring and checking displacements, dimensions, run-outs, surface profiles and deformations of engineered objects.



- Innovative technology of absolute measurement
- Measuring ranges from 3 to 55 mm
- 0.1  $\mu\text{m}$  resolution
- Emulation of incremental encoder signals

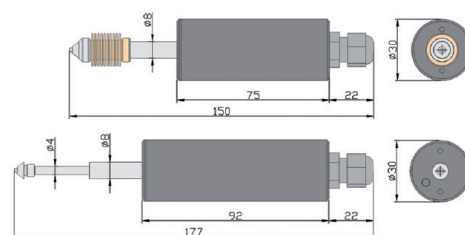

RF251

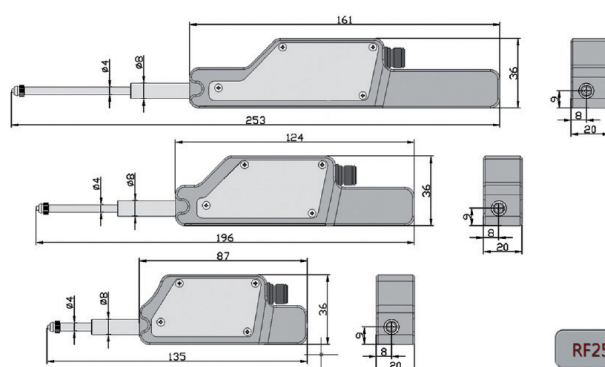

RF256

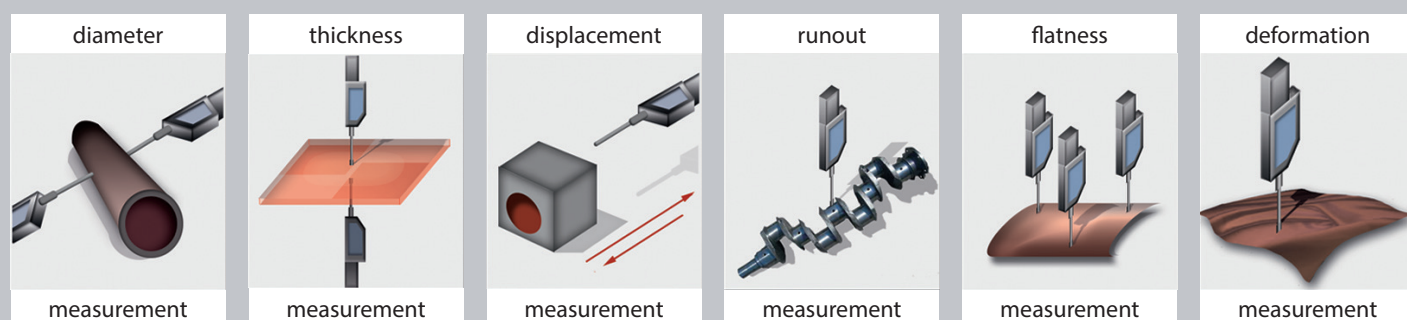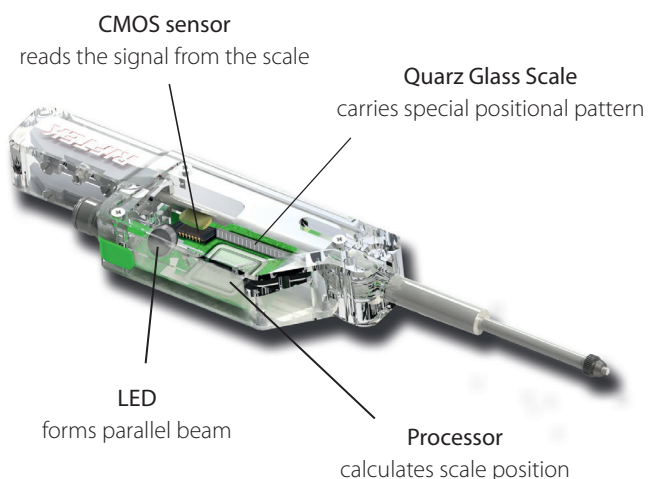

RF25X-		RF251-3	RF251-25	RF256-15	RF256-35	RF256-55
Measurement range, mm		3	25	15	35	55
Accuracy (at T=20 °C), $\mu\text{m}$			$\pm 2$			$\pm 3$
Resolution, $\mu\text{m}$			0.1 or 0.5 or 1 or 5 or 10			
Output interface	digital	RS422	(RS485 and SSI or RS232) and (EncD5 or EncD10 – emulation of quadrature signals of incremental transducers) 0...20 mA (<500 Ohm load) or 0...10 V			
	analog	no				
Synchronization input			no		opto-isolated	
Logical outputs		no		two outputs, NPN: 100 mA max; 40 V max		
Indication			no		two-color LED (red/green)	
Power supply, V			12 (without analogue output) 15 (with analogue output)			
Power consumption, W			0.75			
Enclosure rating		IP57		IP50		
Operating temperature, °C		-40...+50		-10...+50		
Weight (without cable), gram		70	110	110	150	180



# OPTICAL MICROMETERS, RF65x SERIES

## OPTICAL MICROMETERS

## RF65X Series

### PURPOSE

Contactless diameter, gaps and technological object position measurement.

### WORKING PRINCIPLE

The micrometer operation is based on the so-called 'shadow' principle. The micrometer consists of two blocks – transmitter and receiver. Radiation of a semiconductor laser or LED is collimated by a lens. With an object placed in the collimated beam region, shadow image formed is scanned with a photo-detector array. A processor calculates the position (size) of the object from the position of shadow border (borders).

### MODELS

**RF651** — universal micrometers

**RF656** — high-precision micrometers with telecentric optics








**RF656XY and RF656.3** — two and three axis micrometers

**RF656.2D** — 2D optical micrometers (from December 2020)

**RF659** — edge sensors


### MAIN FEATURES

- Measurement range from 5 to 100 mm
- Up to  $\pm 0.3 \mu\text{m}$  accuracy
- Up to 10 000 Hz sampling rate
- RS232/RS485/Ethernet/CAN +4...20 mA/0...10V
- Micrometers with telecentric lens
- Mutual synchronization of the sensors (master-slave) for multi-axis measurement tasks
- Service Software for micrometers parameterization
- Free SDK and examples for Windows, Linux, .NET, MATLAB, LabVIEW
- Dual, three and multi axis Micrometers
- Air-knife window protection

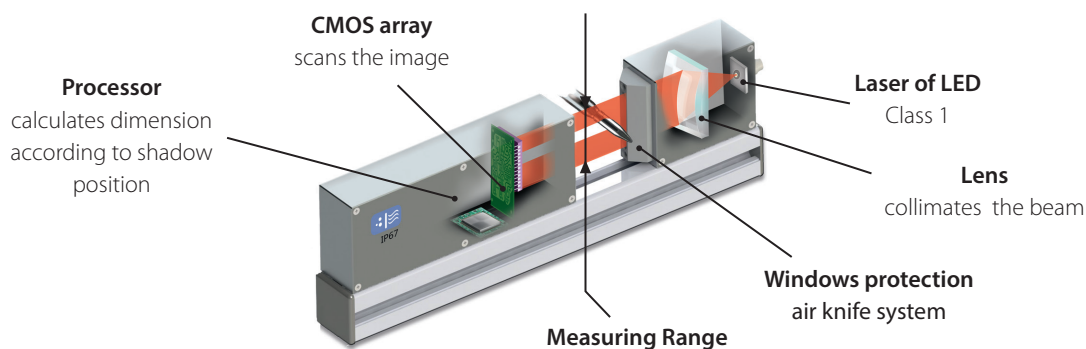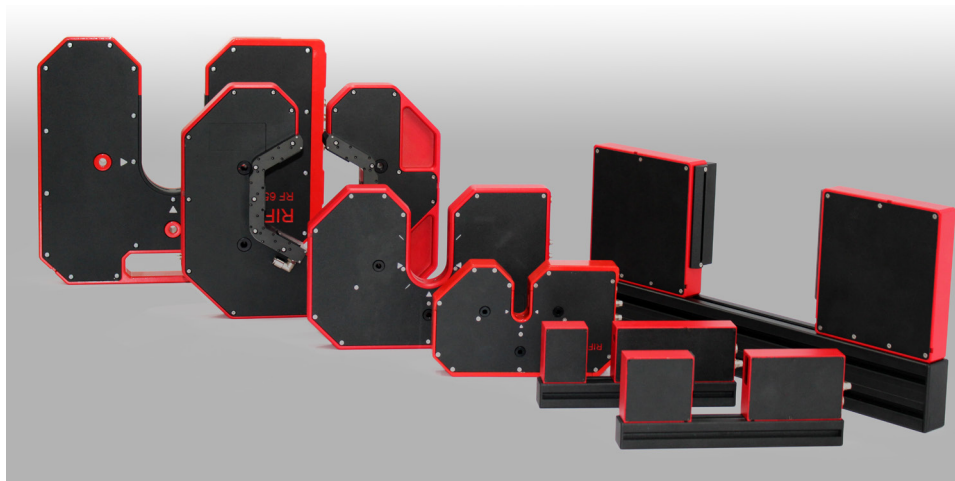


# OPTICAL MICROMETERS, RF65x SERIES

	A, mm	B, mm	C, mm	D, mm	E, mm	H, mm	H1, mm	K, mm	N, mm
RF651-25	51	139	62	25	13	28	42.5	30	30
RF651-50	91	120	134	50	20	31	45.5	40	80
RF651-75	128	132	132	75	15	31	45.5	40	80
RF651-100	165	165	150	98	20	31	45.5	40	80

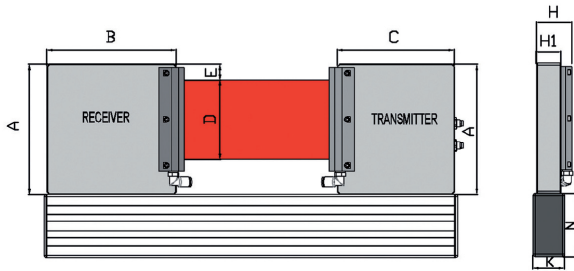

	A, mm	B, mm	C, mm	D, mm	E, mm	K, mm	R, mm	M, mm	N, mm
RF656-5	66	50	158	5	14	28	2	30	30
RF656-10	50	70	126	10	11.5	56	6	30	30
RF656-25	72	74	106	25	7	63	10	30	30
RF656-50	105	134	110	50	20	150	25	30	60
RF656-75	135	148	125	75	17	200	40	40	80
RF656-100	175	170	160	100	20	300	50	40	80

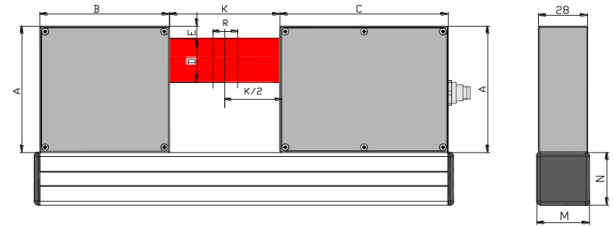

RF65X-		RF651-25	RF651-50	RF651-75	RF651-100	RF656-5	RF656-10	RF656-25	RF656-50	RF656-75	RF656-100
Measurement range, mm		25	50	75	98	±1x5	±3x10	±5x25	±7x50	±9x75	±10x100
Minimum size of the object, mm		0.5	1	1.5	2	0.05 (0.1)	0.1 (0.2)	0.25 (0.5)	0.5 (1)	0.75 (1.5)	1 (2)
Accuracy <sup>1</sup> , μm		±5	±10	±15	±20	±0.3	±0.5	±1	±2	±3	±5
Measurement frequency, Hz		500	500	500	500	500	1500	1500	1500	1500	1500
Light source		LED or laser									
Laser safety class		1 (IEC60825-1)									
Output interface	digital	RS232 (max. 921.6 kbit/s) or RS485 (max. 921.6 kbit/s) or Ethernet & (RS32 or RS485)									
	analog										
Synchronization input		2.4 – 5 V (CMOS, TTL)									
Logic output		three outputs, NPN: 100 mA max; 40 V max									
Power supply, V		24 (9 ...36)									
Power consumption, W		1.5..2									
Housing material		aluminum									
Weight (without cable), gram		600	2000	2600	4000	600	600	600	1500	3200	4500


<sup>1</sup> typical data obtained when a knife edge was used to interrupt the beam and distance between transmitter and receiver is equal of two measurement range

<sup>1</sup> typical data obtained when a knife edge was used to interrupt the beam and distance between transmitter and receiver is equal of two measurement range


## RF656 TWO AND THREE AXIS MICROMETERS. TWIN MICROMETERS

The parameters for each axis of the micrometer match to the parameters of the corresponding single-axis micrometer, see Table above.


### RF656XY-5

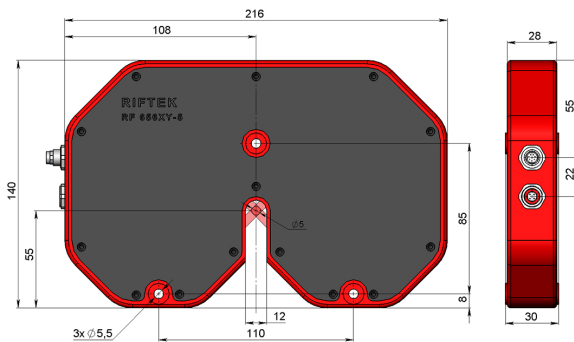


### RF656XY-10

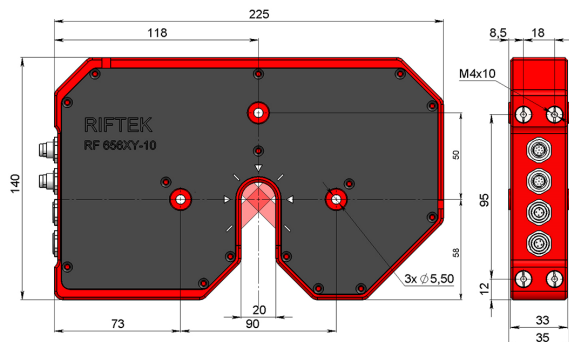

### RF656XY-25

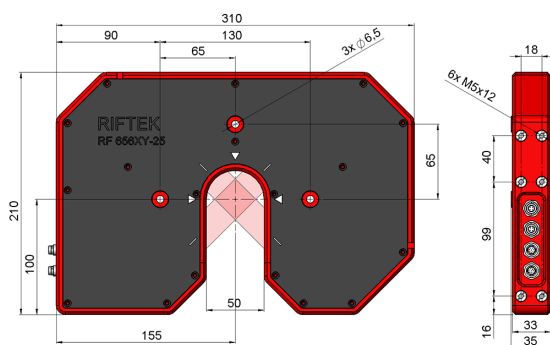

### RF656XY-50

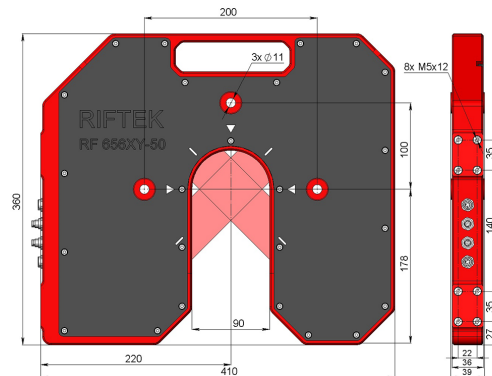





# OPTICAL MICROMETERS, RF65x SERIES

## RF656 TWO AND THREE AXIS MICROMETERS. TWIN MICROMETERS


**RF656XY-75**

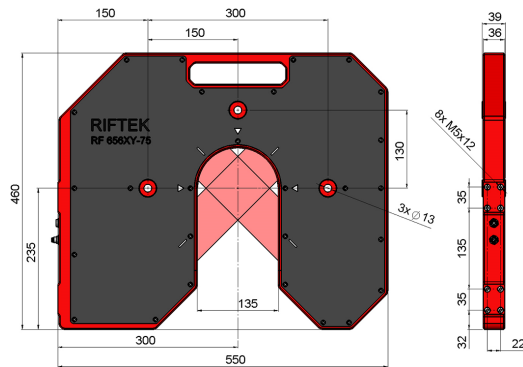


**RF656XY-100**

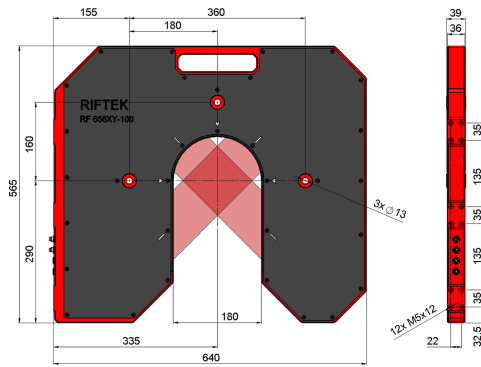



**RF656.3-25**

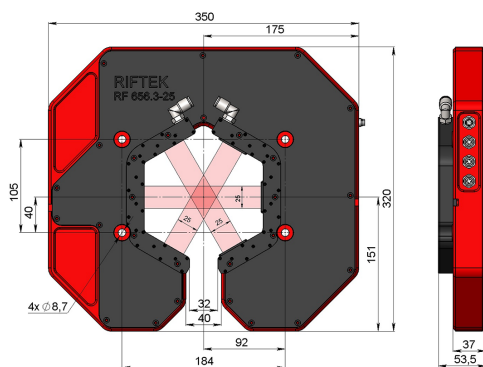

**RF656TWIN-75**

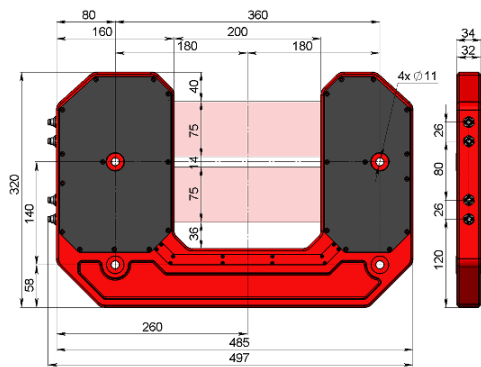


## SOFTWARE

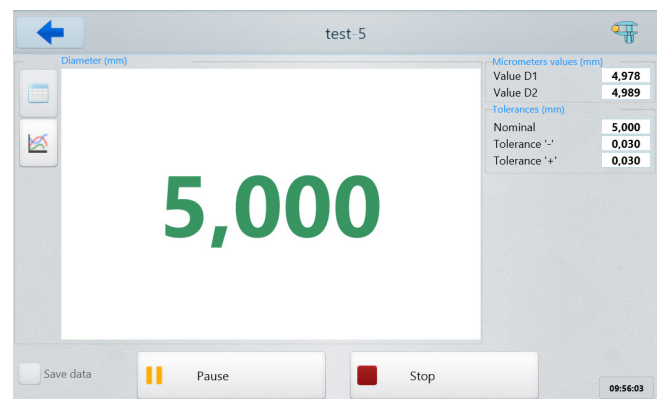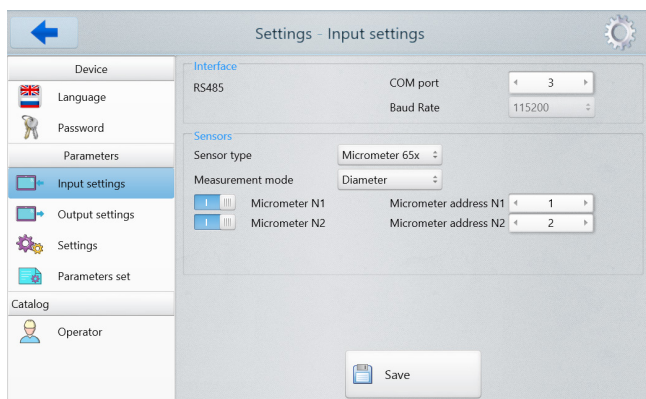

## EDGE AND DIAMETER SENSORS

### RF659 Series

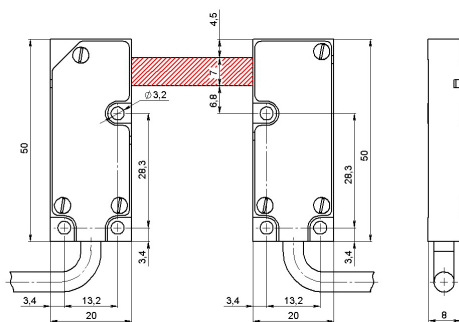


The sensors are intended for non-contact measuring and monitoring the position of the edge (edges) of various objects, such as tapes, plates, substrates, etc.



Parameter	Value
Distance between transmitter and receiver	30 mm
Measurement range	7 mm
Accuracy	±20 µm

## 2D OPTICAL MICROMETERS

### RF656.2D Series

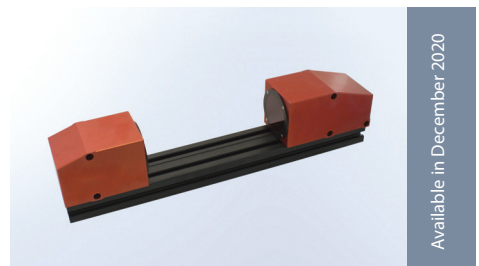

Measurement of geometrical parameters of complex objects.

Available in December 2020

## PURPOSE

Non-contact measuring and checking of surface profile, dimensions, deformations, flatness, gaps, volume, 3D models construction.

## WORKING PRINCIPLE

Scanner operation is based on the principle of optical triangulation.

Radiation of a semiconductor laser is formed by a lens in a line and projected to an object. Radiation scattered from the object is collected by the lens and directed to a two-dimensional CMOS image sensor. The image of object outline thus formed is analyzed by a signal processor, which calculates the distance to the object (Z-coordinate) for each point of the set along the laser line on the object (X-coordinate). Scanners are characterized by base distance (beginning of the range), SMR, for Z-coordinate, measuring range (MR) for Z-coordinate, measuring range for X-coordinate at the beginning of Z (Xsmr) and measuring range for X-coordinate at the end of Z (Xemr).

## MAIN FEATURES

- Measuring ranges from 10 to 1100 mm
- 0.05% linearity
- Sampling rate up to 6800 profiles/s
- Scanners with RED, BLUE and IR lasers
- Laser Safety Class 2M
- Binocular scanners
- Trigger and encoder synchronization, mutual synchronization
- WEB-interface
- Free SDK and examples for Windows, Linux, .NET, MATLAB, LabVIEW
- Specialized scanners for hole control

## MODELS

**RF627** — universal scanners



**RF627Weld** — scanners for welding robots

**RF627Weld-Smart** — scanners with built-in tracking functions (from December 2020)

**RF627AVIKScan** — weld inspections scanners


**RF627Smart** — scanners with built-in measurement functions (from November 2020)


**RF629** — ultra-fast scanners, up to 50000 profiles/s (from November 2020)

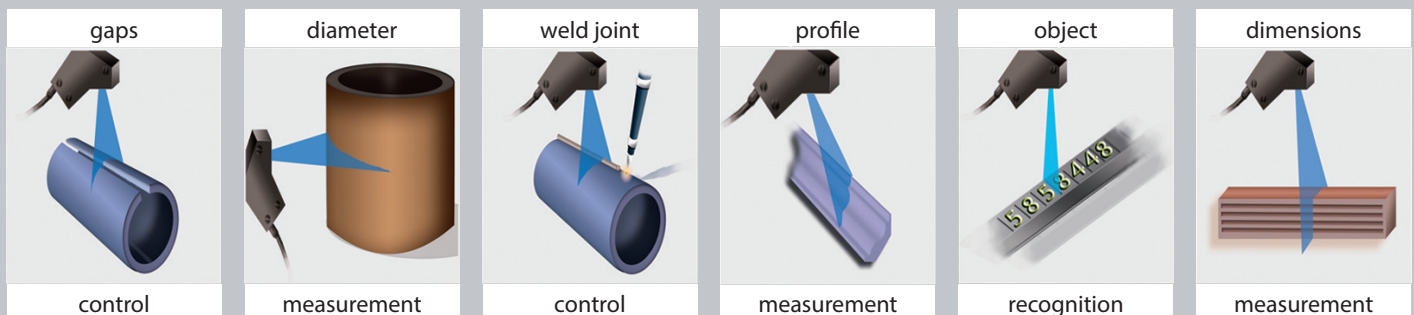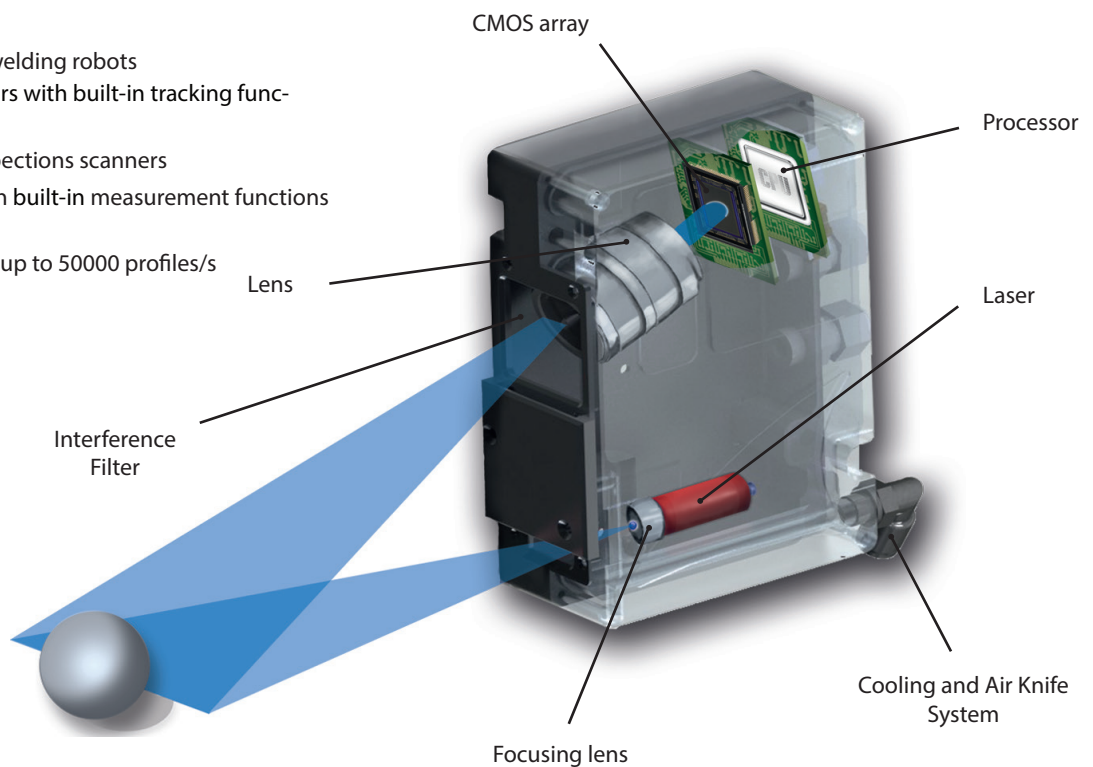


### OPTIONS

- Cooling plate with air-knife and air/water cooling
- Customized versions with non-standard base, range and housing shape
- Special version for use in vacuum conditions
- Special flexible cable for robotic applications

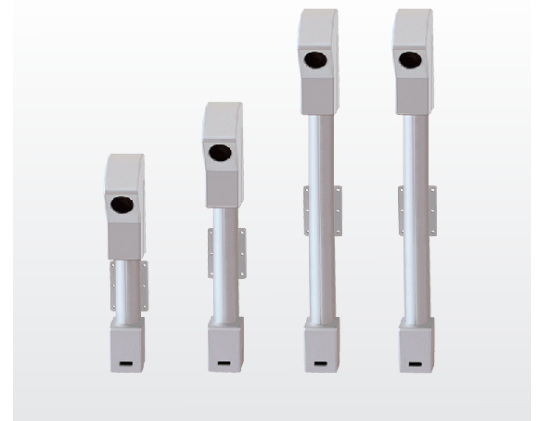



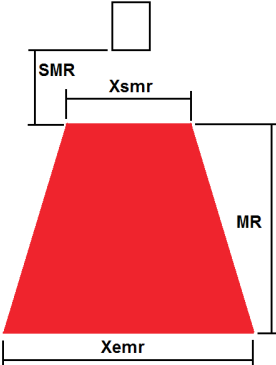
RF627-	MR, мм	SMR, мм	EMR, мм	Xsmr,мм	Xemr,мм	Size, mm	Weight, g		
25/10-8/11	10	25	35	8	11	Fig. 1	0.37		
65/25-20/22	25	65	90	20	22	Fig. 2	0.6		
75/50-30/41	50	75	125	30	41				
70/100-48/82	100	70	170	48	82				
70/150-58/122	150	70	220	58	122				
95/150-53/106	150	95	245	53	106				
82/200-60/150	200	82	282	60	150				
90/250-65/180	250	90	340	65	180	Fig. 3	2		
180/250-170/278	250	180	430	170	278				L=326
190/300-160/300	300	190	490	160	300				L=283
220/300-203/330	300	220	520	203	330				L=374
260/400-210/400	400	260	660	210	400				L=350
325/500-268/500	500	325	825	268	500				L=415
400/600-320/600	600	400	1000	320	600				L=490
475/700-374/700	700	475	1175	374	700				L=558
545/800-425/800	800	545	1345	425	800			L=627	
615/900-480/900	900	615	1515	480	900			L=696	
690/1000-535/1000	1000	690	1690	535	1000	L=765			
620/1165-430/1010	1165	620	1785	430	1010	L=554	2.5		
Overall specifications									
Sampling rate, Hz		Full range: 485 or 938 (DS mode), ROI: 5096 or 6800 (DS mode)							
Linearity Z, %FS		0.05 or 0.1 for DS mode							
Linearity X, %FS		0.1							
Resolution Z, %FS		0.01% or 0.02% (DS mode)							
Resolution X		648 or 1296 (programmable value)							
Environment resistance:									
Enclosure rating		IP67							
Vibration		20g/10...1000Hz, 6 hours, for each of XYZ axes							
Shock		30 g/6 ms							
Ambient temperature, °C		0...+40, (-20...+40 for the sensors with built-in heater), (-30...+120 for the sensors with built-in heater and water/air cooling housing)							
Relative humidity		5-95% (no condensation)							
Storage temperature, °C		-20...+70							
Housing/windows material		aluminum/glass							

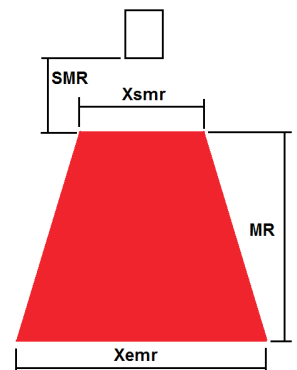

### SOFTWARE

WEB-INTERFACE  
for scanner parameterization,  
image and profile visualization

- Setting sensor parameters
- Data receiving, storage, visualization

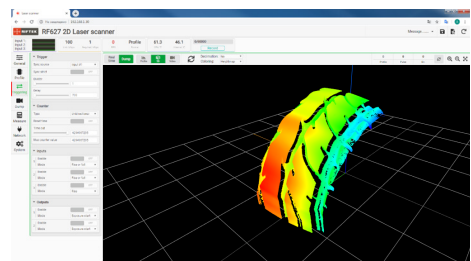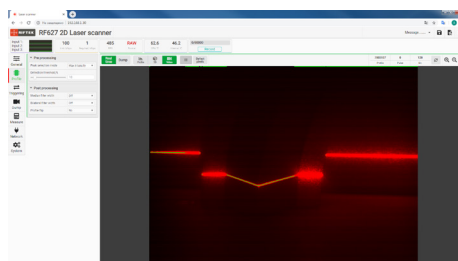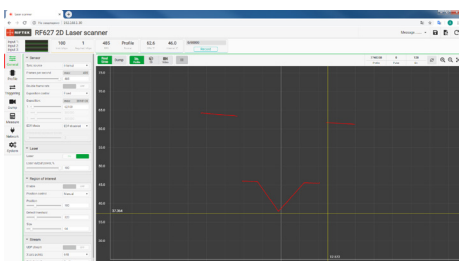

## LASER SCANNERS

## RF627 Series

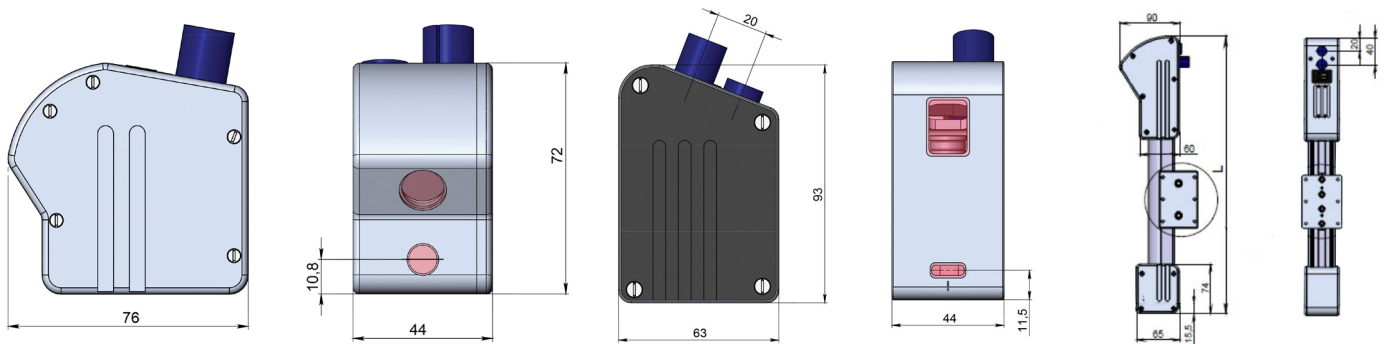


Figure 1

Figure 2

Figure 3

## SPECIALIZED SCANNERS



Rail profile control scanners with high-power (2W) IR laser



Ore volume control scanners with high-power (2W) IR laser



Internal thread control scanners (case diameter 45 mm)

## 3D OPTICAL SCANNER



### RF635 - 3D scanners on the base of structured light

#### PURPOSE

3D models creation and measurement

#### WORKING PRINCIPLES

The scanner contains a projector that sequentially projects onto the object a series of stripes of different periods. Images of the strips are captured by two cameras, located at an angle to each other, and analyzed by the built-in processor, which generates a 3D model of the object.

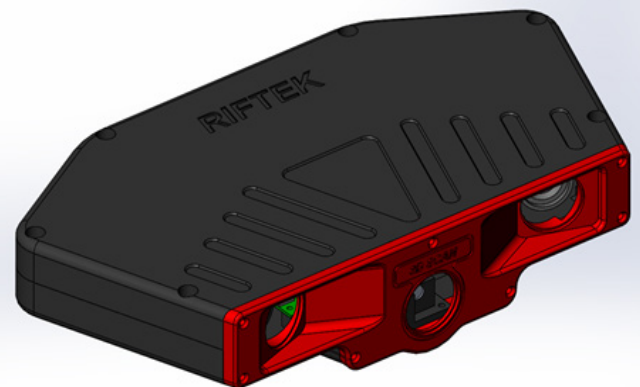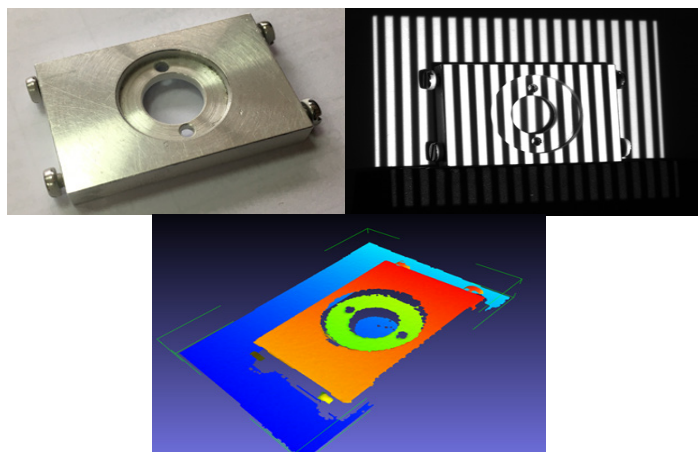

Parameter	Value
Scan rate, Hz	4
Base distance, mm	200
FOV, mm	75 x 50...95 x 67
Accuracy (depth), mm	±0.05
Resolution XY, mm	0.08
Interface	Ethernet
Weight, kg	2



# HOW IT WORKS

- Laser scanners and software for welding robots
- Recognition, tracking and measuring in real time
- Various protocols for communication with robots

Range	SMR, mm	MR, mm	Xsmr, mm	Xemr, mm	Laser
65/25-21/25	65	25	21	25	Class 2M
70/130-35/86	70	130	35	86	
90/250-65/180	90	250	65	180	

For the rest parameters see "Overall specifications" in the previous page.

Technical drawing of the ECU showing front and side views with dimensions and labels.

**Front View Dimensions:**

- Top width: 45
- Right height: 89.5
- Bottom width: 35
- Bottom left height: 8.2

**Labels:**



- Button
- Connector
- Air

**Side View Dimensions:**

- Top width: 83
- Right height: 97.7
- Bottom width: 123
- Bottom width (including mounting plate): 159

**Labels:**

- Splatted shield
- Mounting plate
- Locking screw

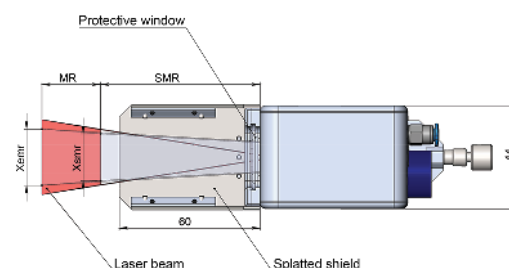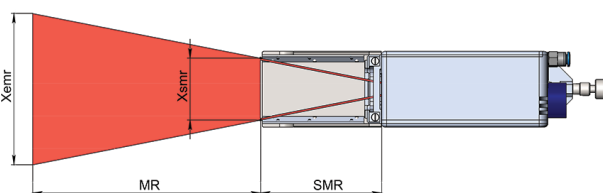
[illegible]

1. Connection between the scanner and Controller RIFTEK RF017 (or PC) with Riftek Lamia
2. Connection between Controller RIFTEK RF017 (or PC) with Riftek Lamia and the robot controller
3. Connection between the robot and the robot controller

The screenshot displays the RHex Lemna software interface. The main window shows a grid with a yellow path labeled 'RHex15'. The path starts at the bottom left, moves up and right, then down and right, and finally up and right. The path ends at a red dot. A tooltip shows the intersection point X and Y coordinates: 'Intersection point, X: 13.96 mm' and 'Intersection point, Y: 34.48 mm'. The interface includes a 'CONNECTION' tab, a 'MATHS' tab, and a 'ROBOTS' tab. The status bar at the bottom shows 'State: Up', 'Ports: 635', 'Packet: 7302', 'Measurement: 5509', 'Preset: 249', and 'M speed: 3'.


## START WORKING

Riftek P1	R691 USI	Riftek P2
Sensor s/n: 206162	Sensor s/n: 206162	Sensor s/n: 206162
Sensor target port: 6003	Sensor target port: 6003	Sensor target port: 6003
Protocol: Riftek P1	Protocol: R691 USI	Protocol: Riftek P2
Server address: 127.0.0.1	Server port: 5020	Server port: 502
Server port: 502	Timeout, s: 60	Timeout, s: 60
<input type="checkbox"/> Debug log		
<div>LOOK SENSOR</div>		
<input type="checkbox"/> State		

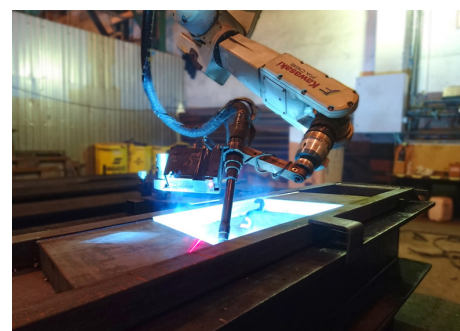

## SPECIALIZED SCANNING SYSTEMS FOR WELDS, WELDED JOINTS AND EDGE PREPARATION

RF627AVIKScan

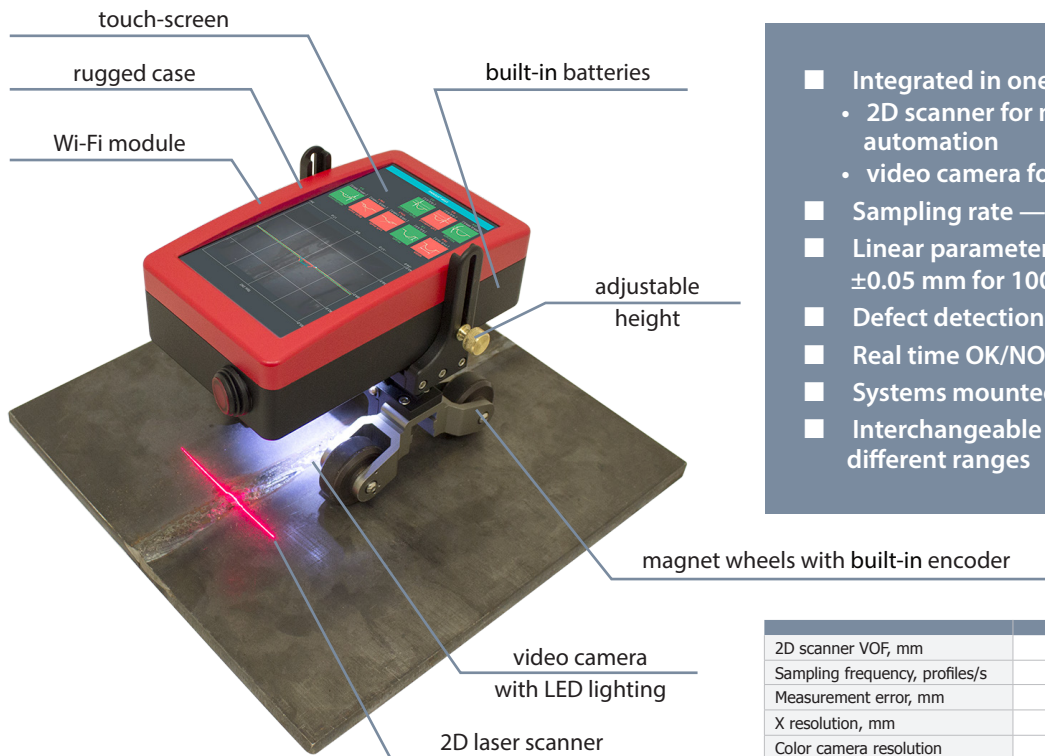

- Integrated in one system:
  - 2D scanner for measurement control automation
  - video camera for visual control automation
- Sampling rate — more than 2000 profiles/s
- Linear parameters measurement error —  $\pm 0.05$  mm for 100 mm range
- Defect detection (porosity, cracks)
- Real time OK/NOK analysis
- Systems mounted on the robot
- Interchangeable measuring heads with different ranges


2D scanner VOF, mm	Z - 120, X - 30...110
Sampling frequency, profiles/s	>2000
Measurement error, mm	$\pm 0.05$
X resolution, mm	0.025...0.08
Color camera resolution	1296 x 976
Camera speed, frames/s	120
Laser	red (660 nm) or blue (405 nm), Class 2
Working temperature, °C	-40...50
Measured parameters	width, height, angles, mismatch, undercut and so on

### EDGE PREPARATION CONTROL




MEASUREMENT OF OFFSET, JOINT ANGLE, GAP WIDTH AND ETC.

### WELD CONTROL

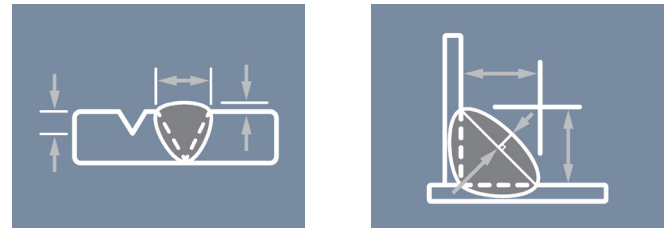


MEASUREMENT OF WELD HEIGHT AND WIDTH, CUTTING DEPTH, CAMBER AND ETC.

### DESIGN

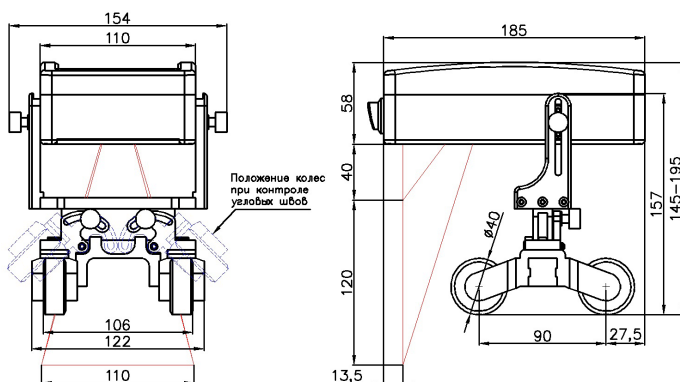

### 3D VISUALIZATION SOFTWARE

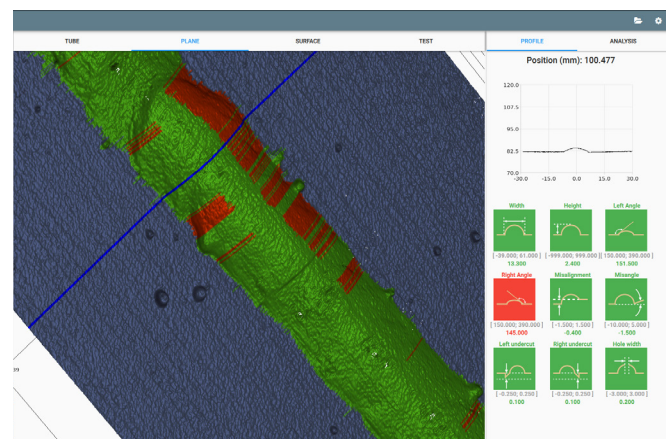





# 3D LASER MEASUREMENTS

## 3D LASER SCANNING KIT

## SHTRIKH-2 SERIES

3D Laser Scanning Kit is designed for mounting on any type of CNC machine and intended for non-contact scanning of products and obtaining 3D computer-simulated models.

In the scanning mode, the machine CNC system moves the sensor line-by-line over the item prototype. Thus, XYZ coordinate array for the surface is formed, i.e. a digital prototype model is created which is saved as a point cloud file as well as in a common STL format suitable for subsequent use in CNC.

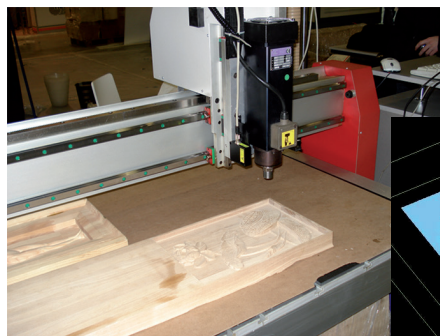

Parameter	Value
Materials to be scanned	any material
Size of scanning area	arbitrary
Average scanning speed, points/s	up to 100 000

## 3D LASER MEASUREMENT MACHINE

## RF1010SS

3D measuring machine is designed for non-contact measurement of geometrical parameters of objects, specifically sunflower seeds. Laser scanner RF625 Series, that is installed in the machine, scans the objects and identifies it's geometry. As result of scanning we get the parameters of every sunflower seed and their total quantity.





Parameter	Value
Nominal sampling rate, profiles/sec	250
Scanning speed, mm/s	100
Accuracy, $\mu\text{m}$	$\pm 150$

## 3D LASER MEASUREMENT MACHINE

## RF1010SL

3D Measurement Machine was specially developed to measure suspension arm's parameters for automotive industry. Laser scanner RF625 Series, which is installed in the machine, scans the suspension arm, measures and controls its geometrical parameters.

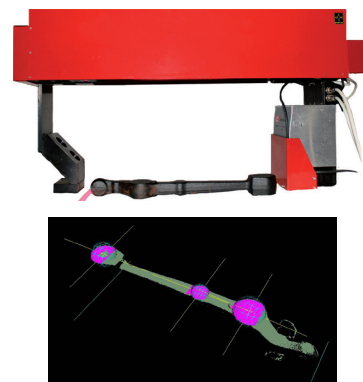

Parameter	Value
Nominal sampling rate, profiles/sec	250
Scanning speed, mm/s	50
Accuracy, % of the range	$\pm 0.1$

## 3D LASER MEASUREMENT MACHINE



## RF1240TB Series

Developed together with MARVIE LLC



3D Measurement Machine is specially designed for control of geometric parameters of large diameter pipes. The machine consists of 24 wide-range high speed synchronized laser scanners type RF625-650 located on the outer circumference of the pipe, which makes it possible to inspect full profile of the pipe in the course of manufacture.

Parameter	Value
Pipes diameter range, mm	500...1450
Accuracy, mm	$\pm 0.1$

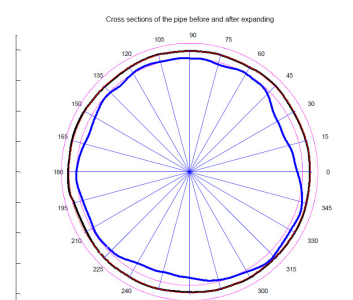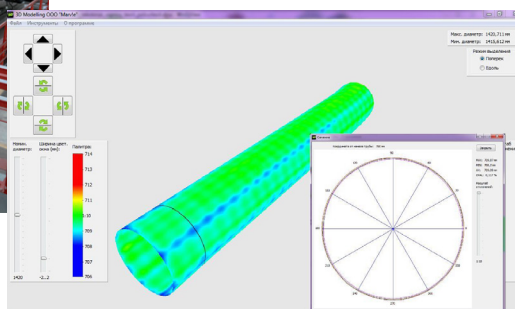

# INNER DIAMETER MEASUREMENT SYSTEMS

Systems are intended for contactless measuring of inner diameter and profiles of gun barrels, cylindrical and taper pipes, progressive cavity stators, turbodrills and so on.

## TWO WORKING PRINCIPLES

- Multisensor measurement by stationary laser sensors - **RF040 Series**
- Inner surface laser scanning by rotating sensors - **RF096 Series**

## SYSTEMS PARAMETERS

- Measured ID – from 6 mm
- Up to several  $\mu\text{m}$  accuracy
- Up to 32000 measured points on the surface in 2 seconds
- Calculation of ovality and roundness
- Surface defects detection and measurement
- 3D model of inner surface design

## SYSTEM STRUCTURE

- Laser measurement module with
  - stationary sensors
  - rotating sensors
- Translation module intended for transportation of measurement module inside the pipe:
  - self propelled
  - any kind of pulling machine
- Software for PC
- Calibration rings

## SYSTEM CAN CONTAIN


Centering frame to hold measurement module near pipe axis

## OPTIONS

- Pipe straightness measurement module
- Video inspection module
- Wireless connection (Wi-Fi) module

## MULTISENSOR MEASUREMENT HEAD

## RF040 Series



The Multisensor Measurement Module contains up to 6 laser triangulation sensors located circumferentially in one housing at known fixed angles.

The measurement module is inserted into the pipe and moved by translation module to the definite position.

Calibrated laser sensors measure distances to the inner surface .

Software calculates diameter of the pipe.

### LASER MEASURING HEAD FOR INNER DIAMETER CONTROL



Parameter	Value
6 laser triangulation sensors	
Diameter range, mm	65...115 or by request
Accuracy, % of range	$\pm 0.1$

### LASER MEASURING HEAD FOR NUCLEAR STATION PIPE DIAMETER CONTROL




Parameter	Value
Diameter of the module, mm	70
Diameter range, mm	95...195 mm (main range) 160...300 mm (extended range)
Accuracy, mm	0.05 mm (main range) 0.2 mm (extended range)

### LASER MEASUREMENT MODULE FOR CONTROL OF LARGE DIAMETER FIBERGLASS PIPES



Parameter	Value
6 laser triangulation sensors	
Diameter range, mm	500-1250
Accuracy, mm	$\pm 0.2$

## MULTISENSOR INNER DIAMETER MEASUREMENT SYSTEMS WITH WI-FI MODULE


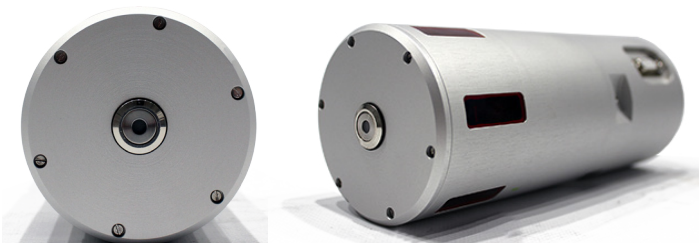


Parameter	Value
ID measurement range, mm	100...150
Accuracy, mm	$\pm 0.05$
Measurement speed, ID /s	500
Light source	Red laser, 660 nm
Laser output power, mW	<1
Laser safety Class	2 (IEC60825-1)
Interface	Wi-Fi, USB
Time of continuous work, hour	4

# INNER DIAMETER MEASUREMENT SYSTEMS

## ROTATING MEASUREMENT HEAD

## RF096 Series

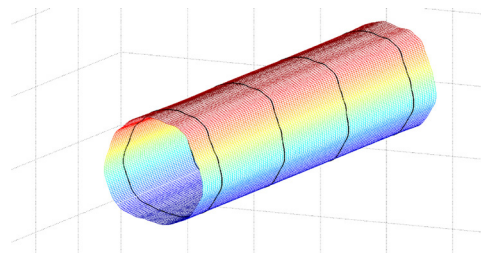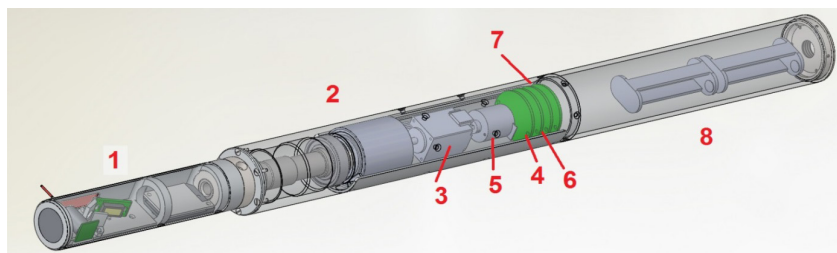

### MULTISENSOR MEASUREMENT MODULE CONTAINS

laser triangulation sensor 1 (one or several with different measurement range and stand-off distance), mounted on rotating platform 2, which contains motor 3 with electronic driver 4, and rotary encoder 5 coupled to the motor 3. The system also includes a tilt sensor 6, intended for control of inclination of rotating platform during measurement.

### OPTIONS

built-in Wi-Fi module 7 is used for communication between the system and PC; the system can be powered from internal batteries 8.

2D laser scanner can be installed instead of points sensor.

The measurement module is inserted into the pipe and moved by pulling machine to the definite position.

Rotating laser sensor scans inner surface of the pipe and the module transmits polar coordinates of the surface (distance from rotation axis, measured by triangulation sensor and a corresponding angle, measured by encoder).

Software uses the set of transmitted coordinates

- to calculate:
  - ID of measured pipe
  - ovality and roundness
- to find:
  - surface defects
- to design
  - Full profile in definite section
  - 3D model of the pipe inner surface

### WHEEL CENTER BORE INNER DIAMETER MEASURING GAUGE




### MODEL RF096-50/70-200-C1b

Non-contact scanning and inner surface geometry measurement of wheel center bore.

Parameter	Value
Rotating measurement head with 2 sensors	
ID range, mm	50...70
ID measurement accuracy, $\mu\text{m}$	$\pm 5$
Depth of measurement, mm	200
Autocalibration	

### MOBILE LASER SCANNING SYSTEM FOR PIPE DIAMETER CONTROL

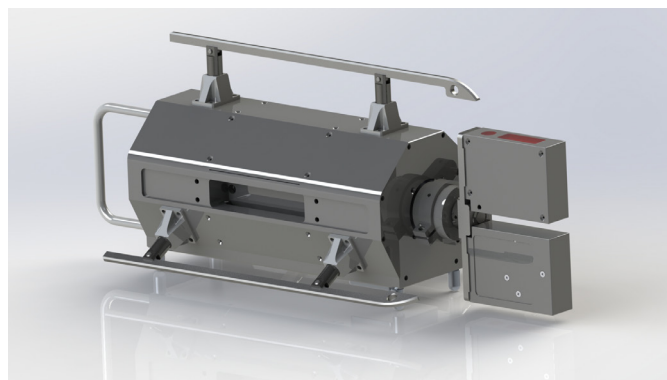

- Rotating measurement head with 2 sensors
- Linear scanning along the tube

Parameter	Value
ID range, mm	146...176
ID measurement accuracy, $\mu\text{m}$	$\pm 10$
Depth of measurement, mm	programmable, up to 70
Battery power supply	
Built-in Wi-Fi module	

## LASER SCANNING SYSTEMS FOR PIPE DIAMETER CONTROL



Parameter	Value
ID range, mm	45...55 or by request
ID measurement accuracy, $\mu\text{m}$	$\pm 2$




# INNER DIAMETER MEASUREMENT SYSTEMS

## LEAF SPRING HOLE INNER DIAMETER MEASUREMENT MACHINE

RF096-30/75-120

The machine is designed for contactless scanning and geometrical parameters measurement of the leaf springs holes.

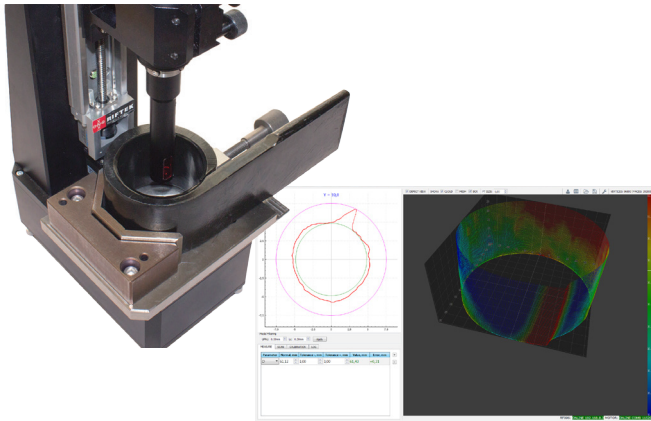


Parameter	Value
Measured diameters, mm	30-75
ID measurement accuracy, mm	±0.04
Depth of measured hole, mm	120
Measured parameters	diameter, roundness, conicity, cylindricity

## LASER DEBRIS INSPECTION SYSTEM

RF096-Insp

The system is intended for non-contact detection of the debris inside the circular grooves of different technological items, for example brake calipers and so on.

The system can be used also for groove seal profiling (seal deformation inspection).

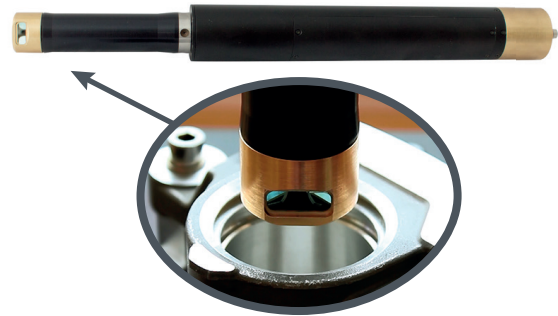


Parameter	Value
Inspected grooves diameter range, mm	35-53
Minimal size of detected debris, mm	0.1x0.1x0.1
Laser sensor linearity, µm	±10
Depth of measured hole, mm	120
Inspection time, s	1.2

## PIPES ID MEASUREMENT MACHINE

RF096-9/16-800

The machine is designed for contactless scanning and geometrical parameters measurement of small diameter pipes.

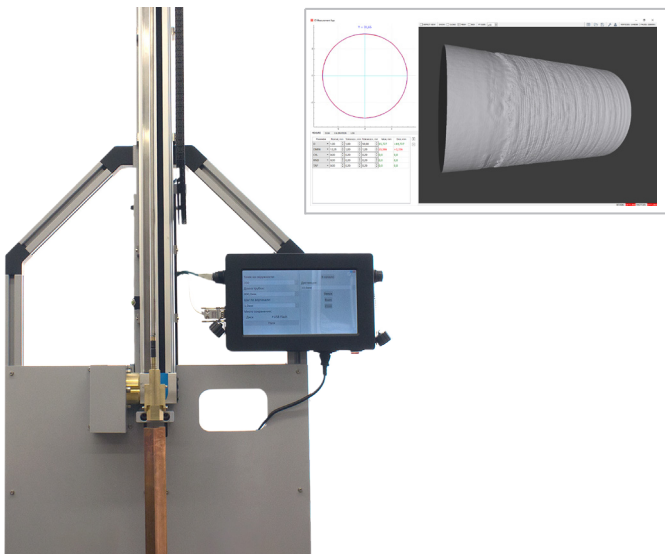

Parameter	Value
ID measurement range, mm	9-16
Accuracy, mm	±5
Pipe length, mm	Up to 800

## PIPES ID MEASUREMENT MACHINE

RF096-35/50-100

The machine is designed for in-line contactless scanning and geometrical parameters measurement of small diameter pipes.



Parameter	Value
ID measurement range, mm	35-50
Accuracy, mm	±5
Pipe length, mm	Up to 100

# INNER DIAMETER MEASUREMENT SYSTEMS


## PIPE INNER DIAMETER MEASUREMENT MACHINE

### MODEL RF096-32/42-100

The machine is designed for contactless scanning and geometrical parameters measurement of inner diameter of pipes, bushes, holes, tubes, and so on.

Application of the machine - large-scale production.

Parameter	Value
Measured diameters, mm	32..42
ID measurement accuracy, $\mu\text{m}$	$\pm 5$
Depth of measured hole, mm	$\leq 80$
Measurement cycle (5 sections), s	13

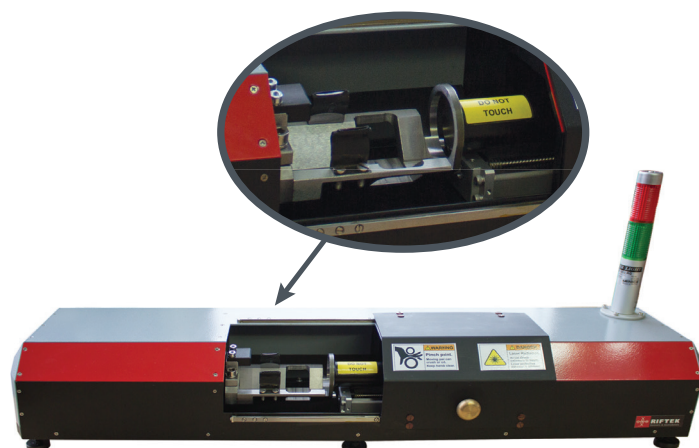

## LASER SCANNING SYSTEM FOR METALLURGICAL NOZZLE INNER DIAMETER CONTROL

### MODEL RF096\_Insp2D-50/140-1000-A

- 2D rotating laser scanner
- synchronous linear translation
- air cooling system
- generating of 3D model of inner surface
- surface defects detection

Parameter	Value
Measured diameters, mm	50...140
ID measurement accuracy, $\mu\text{m}$	$\pm 50$
Minimum size of defects controlled, mm	0.1



## INNER DIAMETER MEASURING GAUGE

### RF096-100/250-87-HH Series


Parameter	Value
ID range, mm	100...250
Accuracy, mm	$\pm 0.03$
Number of laser sensors	2
Depth of measurement	on request
Measurement time, s	1
Resolution for cross-section, points	3200
Laser safety Class	2
Display	LED 4.3"
Power supply	Li-ion battery, 5400 mAh
Number of measurements before recharging the battery, not less	3000

The Specification can be changed on request

The device is designed for ID measurement of pipes, channels and so on

Measured parameters:

- inner diameter;
- ovality;
- roundness;

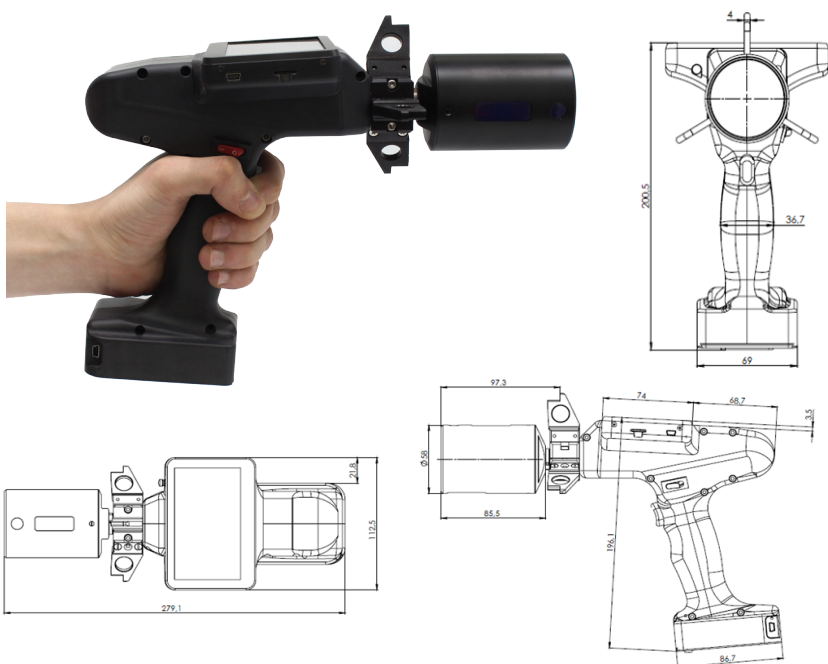

# SPECIAL MEASUREMENT SYSTEMS

## LAMINATED TUBES GEOMETRY MEASUREMENT SYSTEM


The system is designed for contactless scanning and geometrical parameters (outer and inner diameter, foil thickness, weld width, tube length) measurement of laminated tubes, made of PBL and ABL foil.



Parameter	Value
Measured diameters, mm	13...50
Diameter measurement accuracy, $\mu\text{m}$	$\pm 10$
Foil thickness range, mm	0.05...0.5
Foil and weld thickness measurement accuracy, $\mu\text{m}$	$\pm 5$
Tube length measurement accuracy, mm	$\pm 0.1$
Interface to PC	Ethernet
Power supply	220

## ONLINE SYSTEMS FOR CONTROL AND REGULATION OF DIAMETER


The systems are designed for non-contact measurement, control and regulation of diameter of technological objects (wire, fiber, hoses, tubes, rods, sausage casings) during their production.

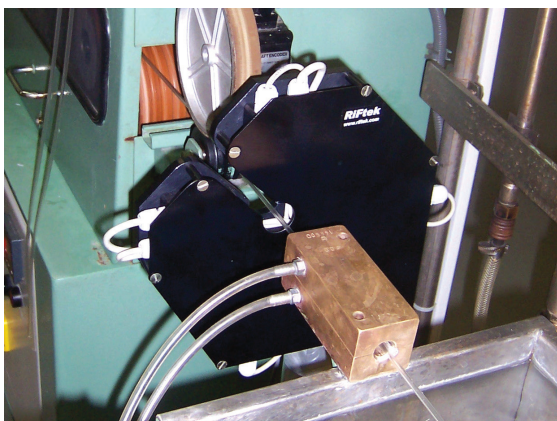

Parameter	Value
Measured diameters, mm	0.3...100
Accuracy, $\mu\text{m}$	from $\pm 1$
Number of controlled sections	up to 6


## LASER SYSTEMS FOR SHEET MATERIALS THICKNESS CONTROL

The systems are intended for in-process contactless measurements of thickness of various sheet materials (plastic, metal, rubber).

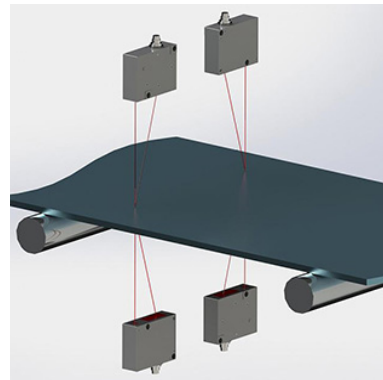

■ RF580 - Thickness Measurement System

■ RF590 - Width Measurement System

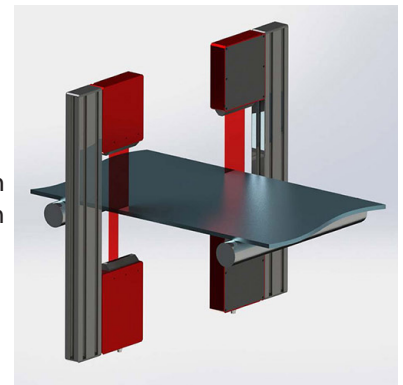


## ADVANTAGES

- Manufacturing process optimization
- Continuous quality monitoring

## AUTOMATED SYSTEMS FOR MOTOR SHAFTS MEASUREMENT

The systems are designed for the measurement and control of motor shafts.

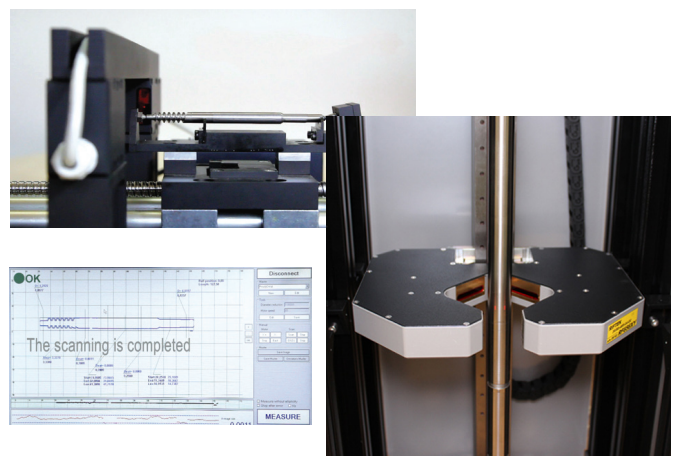

Parameter	Value
Measured diameters, mm	0.1...100 (or on request)
Measurement error, $\mu\text{m}$	$\pm 2$
Length	on request





# SPEED AND DISTANCE SENSORS

## SPEED AND DISTANCE SENSORS

## ISD-3 & ISD-5 Series

The sensors are intended for automotive and industrial application for precise contactless measurement of speed and length of nearly any moving object.

Designed for use in automobile and railway transport, metallurgy, cable, chemical, pulp and paper, textile and wood industries, in automated control systems, cutting and accounting systems.



ISD-3 Parameter	Value	Comments
Speed range, Km/h	0.4 – 200	At TTLout 400 Hz per m/s. Others on request
Speed accuracy	±0.2 % RMS	Determined on test bench (treadmill) at 18.38 km/h
Absolute distance accuracy*	±0.2 % RMS	After calibration at S >100 m
Measuring frequency, Hz	22	
Nominal distance to the road and tolerance (range of working distance), mm	280 ± 140 (140 – 420)	Up to 800 mm on request
System power supply (tolerance)	12 V nominal (11 – 14.5V)	
System power consumption, Wt	Sensor head: 10 Wt Processor unit: 5 Wt	
Sensor head operation temperature range, °C	-20...+50	
Weight of the sensor + mounting bracket, g	280 + 120	Without cable
Weight of the processor unit, g	400	
Sensor dimensions, mm	Ø55 x 205 + illuminator	
Processor unit dimensions, mm	120x100x35	
Sensor cable length, m	2.5	Up to 10 m on request
System power cable length, m	2	Up to 10 m on request
Environmental sensor head protection	IP67	
Magnetic fixing tool	4 magnets x 16 Kg strength	
Output signal	TTL (SMOS) 0 – 5 V meander type, 400 Hz per m/s (=400 pulses/m)	Others on request

ISD-5 Parameter	ISD-5 Standard	ISD-5 Mini	Comments
Speed range, m/s	0.02 - 20	0.005 - 5	Typical values. The less nominal working distance the less min and max speed range
Speed accuracy*, % RMS	±0.07 ±0.02	±0.15 ±0.05	No signal averaging With averaging 0.2 - 0.3 s, at V > 1 m/s
Length accuracy*, % RMS	<±0.05	<±0.1	While pre-calibration for path lengths > 2 m
Measuring frequency, Hz	16 - 54		
Nominal distance to the object (tolerance), cm	10, 20, 30, 50, 75, 100	10, 15, 20	Could be noted at ordering
Distance tolerance	±20-25% of nominal		Depends on the surface ( on the edge of the range signal decreased)
Emitter type, mW	Visible or IR c.v. laser, 5 – 120	Visible c.v. laser, <5	class 3B – 3R
Power supply, V	12 (8 - 14)		Internal linear voltage regulators +5V in sensor and controller unit
Power consumption, Wt: Sensor	0.5 - 2	0.5	
Controller unit	1		
Temperature working range, °C	+15...+50		-10...+50 – with active thermostabilization option): -50...+80°C with protect air cooling housing (option)
Sensor weight, g	320	70	
Sensor size, mm	85x79x46	58x43x30	Without connector, blend and fixing holes
Cable length from sensor to controller unit, V	1.8 or 3		Standard cable RS-232 or VGA with DB9 connectors are used. To extend a length it is possible to connect cables sequential
Sensor environmental protection	IP67		
Controller unit:			
Dimensions, mm	120x100x35		
Weight, g	350		
Analog out:	Length, 2000 pulses/m (=speed 2000 Hz/(m/s), meander 0 – 3 V, TTL compatible, up to 200 KHz		Typical values, user adjustable (see software description below)
Frequency out:	Ethernet (UDP protocol)		Others on request
Digital out:			
Physical data latency at measurement freq, ms	9 31		Stable, =½ of measuring time, without averaging
Base Software	- Program to read data via Ethernet, visualization and saving data, - Program for sensor diagnostics, - Read data example (LabView 8.2.1 and higher), - Dynamic library (DLL) to read data via Ethernet, - Sensor parameters configuration via any Internet browser		Custom software by request are possible

# MEASUREMENT INSTRUMENTS FOR RAILWAY TRANSPORT

## RAILWAY WHEEL PROFILE GAUGE

## IKP Series



The laser profilometer is designed for measuring

- flange thickness, slope and height, rim/tire thickness,
- full profile scanning and analyze of wheel rolling surface,
- maintaining of electronic wear data base,
- control of tolerances and sorting in the course of checkup, examination, repair and formation of railway wheel sets.

The device is supplied with database and software package for wheel sets wear data storage and processing.


Measurements are made directly on rolling stock without wheel set roll-out.

Parameter	Value
Measurement range flange height, mm	20...45
"-" flange thickness, mm	20...50
"-" flange slope, mm	1...15
"-" rim thickness, mm	36...100 (30...90)
"-" diameter (calculation method), mm	400...1400
Measurement error flange height, mm	± 0.03
"-" flange thickness, mm	± 0.03
"-" flange slope, mm	± 0.1
"-" rim thickness, mm	± 0.1
"-" diameter, mm	± 0.1
Discreteness of indication all parameters, mm	0.01
Profile measurement range, mm	145
Discreteness of the profile formation, not worse than, mm	0.025 (5800 points for profile)
Measurement time, s	adaptive, depending on surface quality, 4 average
Power supply (laser scanning module)	3,7V, Li-ion rechargeable battery 5400mAh for standard IKP and 2400mAh for Short and SShort
The number of measurements that can be taken before battery recharge is not less than	5000 for standard IKP and 2200 for Short and Super-short
Laser module battery life time	5 million measurement cycles
Power supply (PDA)	3,7V
PDA memory capacity	Li-polymer battery 3300mAh
Interface between laser scanning module and PDA	100 000 measurements
Working temperature range, °C	Bluetooth
Enclosure rating	-20...+50
	IP42 or IP64

PDA is intended for control of the laser scanning module, data reception from the scanning module, indication of measurement result, parameter input and data storage.



Operator mounts the laser scanning module onto the wheel to be measured. Having received a command from PDA or PC, the laser module performs non-contact scanning of the wheel surface.




## IKP-5 SOFTWARE

### MAIN FEATURES

- User-Friendly Interface;
- Flexible setting of measured Parameters of the Wheel Flange;
- The list of Calculated Parameters:
  - Flange Height, Thickness and Slope,
  - Wear parameters (Vertical, Horizontal and Angular Wear, Hollow, Difference of Diameters, Even/Uneven Wear),
  - Angular Profile Parameters,
  - Rim Width and Thickness,
  - Wheel Diameter,
  - Wheel Defects (Slides and Cavities),
  - Special Flange Parameters of the Tram Wheel and etc.;
- Setting of displayed Identification Parameters of the Wheelset. I.e., you can select only required parameters (number, series, operator, mileage, and etc.) for displaying on the screen;
- Simple Calibration Procedure: it performs automatically by clicking one button;
- The possibility to compare several Saved Profiles;

- The possibility to align Measured Profile manually (by buttons) relative to the reference with saving;
- Possibility to save several Bluetooth-devices in the PDA memory and then to select the required one from the list. I.e. You save addresses of several IKP and after that you need only to select the required one from the list without a necessity of searching procedure (the same is for IMR and IDK);
- Possibility to connect PDA to PC as an External Storage Device (alternative of ActiveSync).

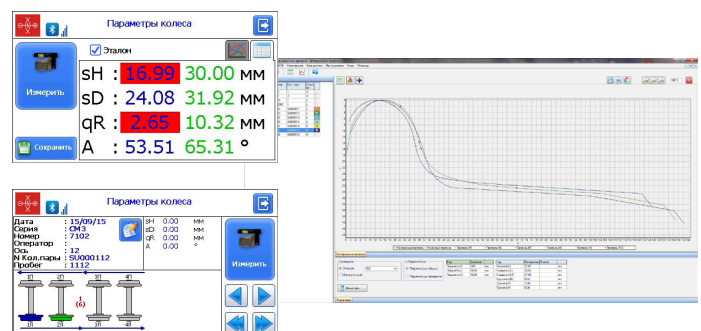

# MEASUREMENT INSTRUMENTS FOR RAILWAY TRANSPORT

## WHEEL DIAMETER MEASUREMENT GAUGE

## IDK Series

Electronic gauge is designed for measuring wheel rolling circle diameter. Measurements are made directly on rolling stock without wheel set roll-out. The measurement of the diameter is performed according to the "three points" technique, without the complete wheel coverage.

The gauge contains numeric display to show the value of the wheel diameter. IDK-BT gauge contains Bluetooth interface for transfer results into wheel-set wear database management system.

Parameter	Value
Measurement range, mm	400...1400 or on request
Measurement error, mm	±0.2
Indication discreteness	0.1mm, 0.01mm * or 0.01 inch **
Position of measurement, S, mm	On request
Distance between axes of ball bearings (base), mm and diameters measurement range, mm	122±0.5 (400...750 mm) or 200±0.5 (400...950 mm) or 250±0.5 (600...1400 mm) or 300±0.5 (720...1400 mm)
Display	build-in, LED
Operating temperature, °C	-15...+55
Power supply	rechargeable battery 2 x AAA 1.2V
Weigh, kg	0.5
The number of measurements that can be taken before battery recharge is not less than	1000



## SPECIAL MODELS OF IKP-5 AND IDK FOR TRAMWAY WHEELS

Special models of IKP-5 and IDK are designed especially for measurement of wheels with restricted space for device placement (tramway wheels):

- Laser Wheel Profile Gauge model **IKP-5-short** (Fig. A) with a shortened handle,
- Laser Wheel Profile Gauge model **IKP-5-Super short** (Fig. B) version for Ansaldo Breda low floor trams,
- Wheel Diameter Measurement Gauge model **IDK-compact** (Fig. C) with the measurement base (distance between ball supports) of the gauge 122 mm and diameter measurement range - 400...750 mm.



Fig. A


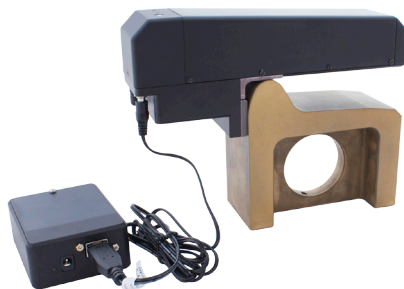


Fig. B



Fig. C

## LASER PROFILOMETER FOR RAILROAD RAILS AND SWITCHERS

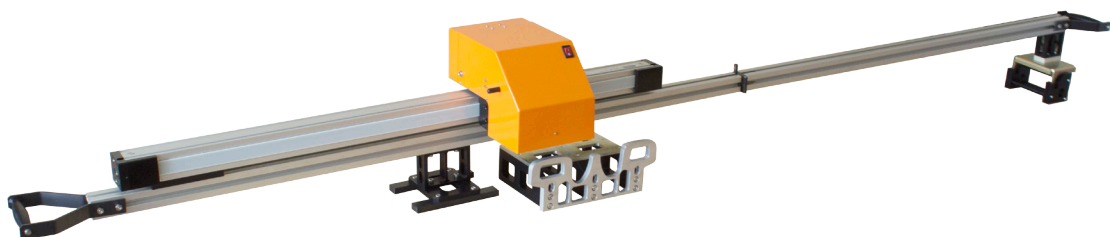

The device consists of frame for device placement on the rails and laser measurement head placed with possibility of linear translation. The measurements are carried out automatically. The measurement result is rails transfer profile.

Parameter	Value
Measurement range, mm	600
Measurement error, mm	±0.1

# MEASUREMENT INSTRUMENTS FOR RAILWAY TRANSPORT

## BACK-TO-BACK DISTANCE MEASURING GAUGES

## IMR and IMR-L Series


Electronic gauge is designed for measuring back-to-back distance of railway, metro and tram wheels in the course of checkup, examination, repair and formation of wheel sets. The method of measurement is based on direct measurement the distance by contactless laser sensor. Measurements are made directly on rolling stock without wheel set roll-out.

### IMR SERIES



Parameter	Value
Measurement range, mm	$L \pm 25$ (L – nominal distance)
Measurement error, mm	$\pm 0.1$
Indication discreteness	0.1mm, or 0.01 inch **
Display	build-in, LED
Operating temperature, °C	-15...+50
Weigh, kg	1
Dimensions, mm	D+137x30x124
Power supply	rechargeable batteries 2xAAA, 1.2V

### IMR-L SERIES

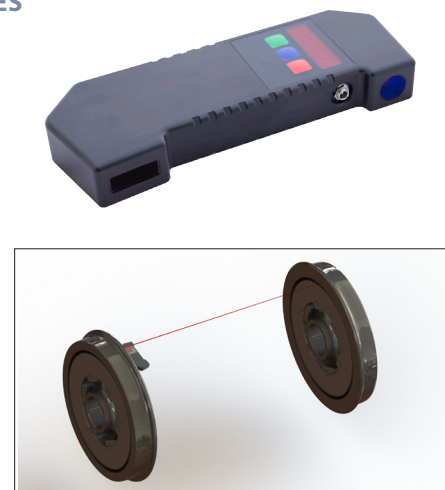

Parameter	Value
Measurement range, mm	1360...1440 or on request (nominal distance $\pm 15$ mm)
Measurement error, mm	$\pm 0.3$
Indication discreteness	0.1mm, 0.01mm * or 0.01 inch
Display	build-in, LED
Operating temperature, °C	-15...+50
Weigh, kg	0.85
Dimensions, mm	234.2x87.7x32
Power supply	rechargeable batteries 4 x AA 1.2V
Connection to PC	Bluetooth

## DISK BRAKES PROFILE GAUGE

## IKD Series


Profilometer uses non-contact method of registration with a laser sensor and a scanning device.

### MAIN FUNCTIONALITY

- obtaining data on the parameters of railway wheel disk brakes working surface;
- full profile scanning and analysis of the working surface of disk brakes;
- visualization of combined graphic images of the actual and new profiles of the wheel brake disks;
- support of the electronic database of profiles.

Profilometer for measuring parameters of the disc brakes installed on the wheel.

Profilometer with a bracket for measuring parameters of the disk brakes installed on the wheelset axle.

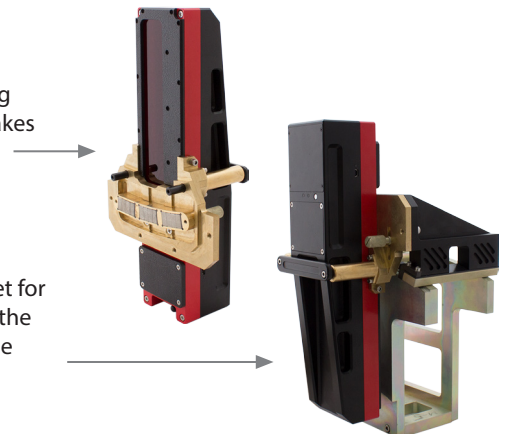

Parameter	Value
Measurement range, mm	30
Profile measurement range, mm	150
Measurement error	$\pm 0.03$
Discreteness of indication, mm	0.01
Discreteness of the profile formation, not worse than, mm	0.1
Power supply, laser module	3.7 Li-ion rechargeable battery 6800 mAh
Power supply, PDA	3.7 Li-polymer battery 3300 mAh
The number of measurements that can be taken before battery recharge is not less than	1000
PDA memory capacity	100 000 measurements
Interface between laser scanning module and PDA	Bluetooth
Working temperature range, °C	-15...+35
Enclosure rating	IP42



# MEASUREMENT INSTRUMENTS FOR RAILWAY TRANSPORT

## RAIL PROFILE MEASUREMENT GAUGE


## PRP Series

Portable laser rail profilometer (PRP) is designed for non-contact registration of cross-section of the railhead acting face.

The profilometer uses non-contact method of registration with a laser sensor and a scanning device.

### MAIN FUNCTIONALITY

- obtaining the information on the cross-section profile of the working railhead surface;
- full profile scanning and analyze of the railhead acting face;
- visualization of the combined graphical images of actual and new crosssection.

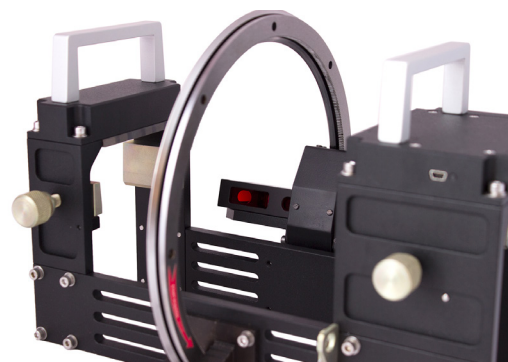

Parameter	Value
Railhead vertical wear, mm	-15.0 ...+20.0
Lateral railhead wear, mm	-15.0...+20.0
Reduced railhead wear, mm	Up to 20.0
Scanning angle inside the rail track, degrees	108
Scanning angle outside the rail track, degrees	108
Measurement error, not more than, mm	±0.03
Scanning time, sec	10-12
Digital readout device (PDA) dimensions, mm	112.5x95.5x22.7
Laser module dimensions, mm	293x230x230
Power supply, laser module	3.7V, Li-ion battery, 6800mAh
Power supply, PDA	3.7V, Li-polymer battery, 3300mAh
The number of measurements that can be taken before battery recharge is not less than	500
PDA memory capacity, no less	100 000 measurements
Interface to PC	Bluetooth

## AUTOMATIC REAL-TIME SYSTEM FOR MEASUREMENT OF WHEELSETS GEOMETRICAL PARAMETERS

## 3DWheel Series


The system is intended for contactless automatic real-time measurement of geometrical parameters of railway vehicles (locomotives, railcars, subway, trams) and uses combination of 2D laser scanners mounted wayside in the track area and calibrated into one common coordinate system.

Measurement cycle starts when an inductive sensor detects a wheel.

While the wheel passes through the system of synchronized 2D laser scanners its profile is taken at many sections.

All measurement readings for all the wheels are sent through Ethernet to control computer for profiles reconstruction and dimensions calculations.

Finally, all the data are collected in the host depot computer in wheel sets wear database.

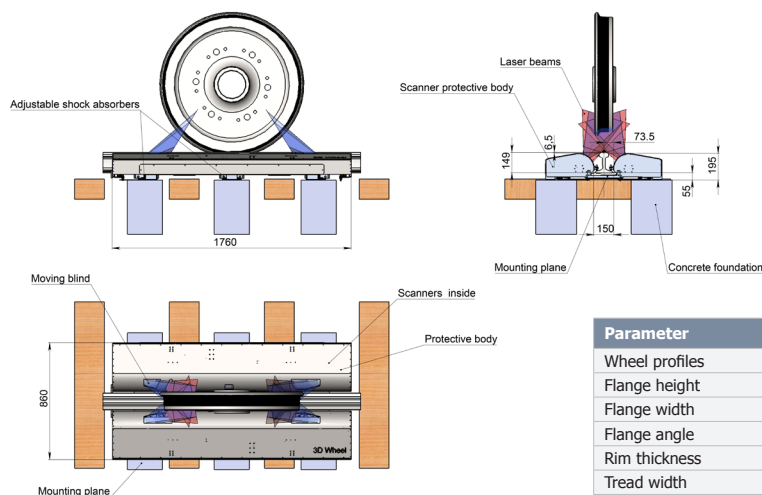

Parameter	Value
Wheel profiles	± 0.1 mm
Flange height	± 0.1 mm
Flange width	± 0.1 mm
Flange angle	± 0.1 mm
Rim thickness	± 0.1 mm
Tread width	± 0.1 mm
Back to back gauge	± 0.05 mm
Wheel diameter	± 0.2 mm

## AUSTRALIA

**Applied Measurement Australia Pty Ltd**  
Thornton Plaza, Unit 5,  
27 Thornton Crescent, Mitcham  
VIC 3132, Australia  
Tel: +61 39874 5777  
Fax: +61 39874 5888  
[sales@appliedmeasurement.com.au](mailto:sales@appliedmeasurement.com.au)  
[www.appliedmeasurement.com.au](http://www.appliedmeasurement.com.au)

## BOSNIA AND HERZEGOVINA

**RMT Ltd.**  
Zahradni 224, 739 21 Paskov  
Tel: +420 558640211  
Fax: +420 558640218  
[rmt@rmt.cz](mailto:rmt@rmt.cz)  
[www.rmt.cz](http://www.rmt.cz)

## CHINA

**Beijing Gemston Mechanical & Electrical Equipment Co.,Ltd**  
**RAILWAY INSTRUMENTS ONLY**  
Room 613, Anfu Mansion, Fengtai District, Beijing, China  
Tel: +86 10 6765 0516  
Fax: +86 10 6765 6966  
Mobile: +86 137 1755 1423  
[dh0526@163.com](mailto:dh0526@163.com)  
[www.baof.cn](http://www.baof.cn)

## CROATIA

**RMT Ltd.**  
Zahradni 224  
739 21 Paskov, Czech Republic  
Tel: +420 558640211  
Fax: +420 558640218  
[rmt@rmt.cz](mailto:rmt@rmt.cz)  
[www.rmt.cz](http://www.rmt.cz)

## FINLAND

**Teräspyörä-Steelwheel OY**  
**RAILWAY INSTRUMENTS ONLY**  
Juvan teollisuuskatu 28  
FI-02920 Espoo, Finland  
Tel: +358 400 422 900  
Fax: +358 9 2511 5510  
[steelwheel@steelwheel.fi](mailto:steelwheel@steelwheel.fi)  
[www.teraspyora.fi](http://www.teraspyora.fi)

## GERMANY

**Hylewicz CNC-Technik**  
**SHTRIKH-2 ONLY**  
Siemensstrasse 13-15,  
47608 Geldern, Germany  
Tel: +49 2831 91021-20  
Fax: +49 2831 91021-99  
[info@cnc-step.de](mailto:info@cnc-step.de)  
[www.cnc-step.de](http://www.cnc-step.de)

## BELARUS

**RIFTEK LLC**  
22, Logoiski trakt, 220090, Minsk, Republic of Belarus  
Tel/Fax: +375 17 357-36-57  
Mobile: +375 29 655-72-55  
[info@riftek.com](mailto:info@riftek.com)  
[www.riftek.com](http://www.riftek.com)

## BULGARIA

**RMT Ltd.**  
Zahradni 224, 739 21 Paskov  
Tel: +420 558640211  
Fax: +420 558640218  
[rmt@rmt.cz](mailto:rmt@rmt.cz)  
[www.rmt.cz](http://www.rmt.cz)

## CHINA

**Xi'an Win-Success Automation Technology Co.,Ltd**  
Room 3-1-1039, Iduhui Building, No.11 Tangyan South Road, High-Tech Zone, Xi'an, Shaanxi PRC, China  
Tel: +86-29-81106280  
Mobile: +86-133-1927-1405  
[info@maxsensor.com](mailto:info@maxsensor.com)  
[www.maxsensor.com](http://www.maxsensor.com)

## CZECH REPUBLIC

**RMT Ltd.**  
Zahradni 224  
739 21 Paskov, Czech Republic  
Tel: +420 558640211  
Fax: +420 558640218  
[rmt@rmt.cz](mailto:rmt@rmt.cz)  
[www.rmt.cz](http://www.rmt.cz)

## FRANCE

**BLET Measurement Group S.A.S.**  
1 avenue du Président Georges Pompidou,  
92500 Rueil Malmaison, France  
Tel: + 33(0)1 80 88 57 85  
Fax: +33(0)1 80 88 57 93  
[technique@blet-mesure.fr](mailto:technique@blet-mesure.fr)  
[www.blet-mesure.fr](http://www.blet-mesure.fr)

## GERMANY

**ALTHEN GmbH Meß- und Sensortechnik**  
Dieselstrasse 2  
65779 Kelkheim, Germany  
Tel: +49 (0)6195 7 00 60  
[info@althen.de](mailto:info@althen.de)  
[www.althen.de](http://www.althen.de)

## BENELUX

**Althen Sensors & Controls BV**  
Vlietweg 17a  
2266KA Leidschendam  
The Netherlands  
Tel: 0031 70 392 44 21  
Fax: 0031 70 364 42 49  
[sales@althen.nl](mailto:sales@althen.nl) / [info@althen.nl](mailto:info@althen.nl)  
[www.althensensors.com](http://www.althensensors.com)  
[www.althencontrols.com](http://www.althencontrols.com)

## CANADA

**Invisual E. Inc.**  
59 Brawley Ave,  
Etobicoke, On. Canada M8Z 4Z5  
Tel: +1 888 530 0712  
Fax: +1 416 530 4787  
[info@invisuale.ca](mailto:info@invisuale.ca)  
[pierre.h@invisuale.ca](mailto:pierre.h@invisuale.ca)  
[www.invisuale.com](http://www.invisuale.com)

## CHINA

**Micron-metrology com., Ltd.**  
No.2, Kecheng Rd., Industrial Park District, Suzhou, Jiangsu Province, China  
Tel: 0512-65589760  
Mobile: +86-189-1806-9807  
[sales@micron-metrology.cn](mailto:sales@micron-metrology.cn)  
[www.micron-metrology.cn](http://www.micron-metrology.cn)

## DENMARK

**BLConsult**  
Ryssbält 294,  
95 291 Kalix, Sweden  
Mobile: +46 70 663 19 25  
[info@blconsult.se](mailto:info@blconsult.se)  
[www.blconsult.se](http://www.blconsult.se)

## GERMANY

**Disynet GmbH**  
Breyeller Str. 2  
41379, Brueggen, Germany  
Tel: +49 (2157) 8799-0  
Fax: +49 (2157) 8799-22  
[disynet@sensoren.de](mailto:disynet@sensoren.de)  
[www.sensoren.de](http://www.sensoren.de)

## HUNGARY

**RMT Ltd.**  
Zahradni 224, 739 21 Paskov  
Tel: +420 558640211  
Fax: +420 558640218  
[rmt@rmt.cz](mailto:rmt@rmt.cz)  
[www.rmt.cz](http://www.rmt.cz)

## BRASIL

**CAPI Controle e Automação Ltda**  
Rua Itororó, 121, CEP 13466-240 Americana-SP, Brazil  
Tel: +55 19 36047068  
Tel: +55 19 34681791  
[capi@capicontrol.com.br](mailto:capi@capicontrol.com.br)  
[www.capicontrol.com.br](http://www.capicontrol.com.br)

## CHILE

**Verne SpA**  
Apoquindo 2818, oficina 31,  
Las Condes, Santiago, Chile  
Tel: +56 2 228858633  
[info@verne.cl](mailto:info@verne.cl)  
[jsaavedra@verne.cl](mailto:jsaavedra@verne.cl)  
[www.verne.cl](http://www.verne.cl)

## CHINA

**Zhenshangyou Technologies Co.,Ltd.**  
Rm 2205-2210, Zhongyou Hotel  
1110 Nanshan Road, Nanshan District 518054 Shenzhen, China  
Tel: +86-755-26528100/8011/8012  
Fax: +86-755-26528210/26435640  
[info@51sensors.com](mailto:info@51sensors.com)  
[www.51sensors.com](http://www.51sensors.com)

## ESTONIA

**RD Resolve OU**  
Punane 14a-304,  
Tallinn 13619, Estonia  
Tel.: +3726206506  
[rdresolv@gmail.com](mailto:rdresolv@gmail.com)

## GERMANY

**Finger GmbH & Co. KG**  
**OPTICAL MICROMETERS ONLY**  
Sapelloh 172,  
31606 Warmsen, Germany  
Tel: +49 5767 96020  
Fax: +49 5767 93004  
[finger@finger-kg.de](mailto:finger@finger-kg.de)  
[www.finger-kg.de](http://www.finger-kg.de)

## INDIA

**Influx Big Data Solutions Pvt Ltd**  
No:2, Krishvi, Ground Floor, Old Airport Road, Domlur, Bangalore - 560071, India  
Tel: +91 73 37748490  
Tel: +91 94 48492380  
[support\\_india@influxtechnology.com](mailto:support_india@influxtechnology.com)  
[milan@influxtechnology.com](mailto:milan@influxtechnology.com)  
[www.influxtechnology.com](http://www.influxtechnology.com)



## INDIA

**Paragon Instrumentation Engineers Pvt. Ltd.**

**RAILWAY INSTRUMENTS ONLY**  
200, Station Road,  
Roorkee, 247 667, India  
Tel: +91-1332-272394  
[tanuj@paragoninstruments.com](mailto:tanuj@paragoninstruments.com)  
[www.paragoninstruments.com](http://www.paragoninstruments.com)

## ITALY

**FAE s.r.l.**

Via Tertulliano, 41  
20137 Milano, Italy  
Tel: +39-02-55187133  
Fax: +39-02-55187399  
[fae@fae.it](mailto:fae@fae.it)  
[www.fae.it](http://www.fae.it)

## MALAYSIA

**OptoCom InstruVentures**

H-49-2, Jalan 5, Cosmoplex  
Industrial Park, Bandar Baru Salak  
Tinggi, Sepang, Malaysia  
Tel: 603 8706 6806  
Fax: 603 8706 6809  
[optocom@tm.net.my](mailto:optocom@tm.net.my)  
[www.optocom.com.my](http://www.optocom.com.my)

## NORWAY

**BLConsult**

Ryssbält 294, 95 291 KALIX, Sweden  
Contactperson: Berndt Lundström  
Tel.: +46 70 663 19 25  
[info@blconsult.se](mailto:info@blconsult.se)  
[www.blconsult.se](http://www.blconsult.se)

## RUSSIA

**Sensorika-M LLC**

Dmitrovskoe highway 64-4  
127474, Moscow, Russia  
Tel: +7 499 487 0363  
Tel: +7 499 753 3990  
Fax: +7 499 487 7460  
[info@sensorika.com](mailto:info@sensorika.com)  
[www.sensorika.com](http://www.sensorika.com)

## SERBIA

**RMT Ltd.**

Zahradni 224  
739 21 Paskov, Czech Republic  
Tel: +420 558640211  
Fax: +420 558640218  
[rmt@rmt.cz](mailto:rmt@rmt.cz)  
[www.rmt.cz](http://www.rmt.cz)

## INDONESIA

**PT. DHAYA BASWARA SANIYASA**

Botanic Junction Blok H-9 NO. 7  
Mega Kebon Jeruk, Joglo  
Jakarta, 11610, Indonesia  
Tel: +62 21 29325859  
[management@ptdb.co.id](mailto:management@ptdb.co.id)

## JAPAN

**Tokyo Instruments, Inc.**

6-18-14 Nishikasai, Edogawa-ku,  
Tokyo, 134-0088 Japan  
Tel: +81 3 3686 4711  
Fax: +81 3 3686 0831  
[f\\_kuribayashi@tokyoinst.co.jp](mailto:f_kuribayashi@tokyoinst.co.jp)  
[www.tokyoinst.co.jp](http://www.tokyoinst.co.jp)

## MONTENEGRO

**RMT Ltd.**

Zahradni 224, 739 21 Paskov  
Tel: +420 558640211  
Fax: +420 558640218  
[rmt@rmt.cz](mailto:rmt@rmt.cz)  
[www.rmt.cz](http://www.rmt.cz)

## PERU

**Verne Perú S.A.C**

Las Codornices 104,  
Surquillo, Lima, Peru  
Tel/fax: +51 992436734  
[info@verne.com.pe](mailto:info@verne.com.pe)  
[www.verne.cl](http://www.verne.cl)

## RUSSIA

**Intellect-Optic**

Ekaterinburg Mira str 32 -120,  
Russia  
Tel./Fax: +7 343 2227565  
Tel./Fax: +7 343 2227370  
[pesterev@d-test.ru](mailto:pesterev@d-test.ru)  
[www.ru.d-test.ru](http://www.ru.d-test.ru)

## SLOVAKIA

**RMT Ltd.**

Zahradni 224  
739 21 Paskov, Czech Republic  
Tel: +420 558640211  
Fax: +420 558640218  
[rmt@rmt.cz](mailto:rmt@rmt.cz)  
[www.rmt.cz](http://www.rmt.cz)

## IRAN

**Novin Industrial Development Grp.**

Tel: +98 21 44022093-6  
Fax: +98 21 43858794  
Mobile: +98 9123207518  
[info@novinid.com](mailto:info@novinid.com)  
[www.novinid.com](http://www.novinid.com)

## LATVIA

**SIA "SOLARTEX"**

**RAILWAY INSTRUMENTS ONLY**  
Terbatas street, 5, Riga, Latvia  
Tel: +371 26578640  
[solartex@inbox.lv](mailto:solartex@inbox.lv)

## NETHERLANDS

**Althen Sensors & Controls BV**

Vlietweg 17a  
2266KA Leidschendam  
The Netherlands  
Tel: 0031-(0)70 392 44 21  
Fax: 0031-(0)70 364 42 49  
[sales@althen.nl](mailto:sales@althen.nl) / [info@althen.nl](mailto:info@althen.nl)  
[www.althensensors.com](http://www.althensensors.com)  
[www.althencontrols.com](http://www.althencontrols.com)

## POLAND

**MTL ASCO Sp. z o.o.**

**RAILWAY INSTRUMENTS ONLY**  
ul. Wielowiejska 53,  
44-120 PYSKOWICE, Poland  
Tel: +48 32 230 45 70  
Fax: +48 32 332 70 14  
[biuro@ascorail.pl](mailto:biuro@ascorail.pl)  
[www.ascorail.pl](http://www.ascorail.pl)

## RUSSIA

**Group company SpecAvtoEngineering SPEKTR KSK**

Electrozavodskaya St, 27  
107023, Moscow, Russia  
Tel: +7 485 225 75 57  
Tel/Fax: +7 495 782 14 21  
[mail@sai-holding.ru](mailto:mail@sai-holding.ru)  
[www.sai-holding.ru](http://www.sai-holding.ru)  
[www.spektrsk.ru](http://www.spektrsk.ru)

## SLOVENIA

**RMT Ltd.**

Zahradni 224  
739 21 Paskov, Czech Republic  
Tel: +420 558640211  
Fax: +420 558640218  
[rmt@rmt.cz](mailto:rmt@rmt.cz)  
[www.rmt.cz](http://www.rmt.cz)

## ISRAEL

**Nisso Dekalo Import Export LTD**

1 David Hamelech Street  
Herzlia 46661 Israel  
Tel: +972-99577888  
Fax: +972-99568860  
[eli@fly-supply.net](mailto:eli@fly-supply.net)  
[www.fly-supply.net](http://www.fly-supply.net)  
[www.aircraft-partsupply.com](http://www.aircraft-partsupply.com)

## LUXEMBOURG

**Althen Sensors & Controls BV**

Vlietweg 17a  
2266KA Leidschendam  
The Netherlands  
Tel: 0031-(0)70 392 44 21  
Fax: 0031-(0)70 364 42 49  
[sales@althen.nl](mailto:sales@althen.nl) / [info@althen.nl](mailto:info@althen.nl)  
[www.althensensors.com](http://www.althensensors.com)  
[www.althencontrols.com](http://www.althencontrols.com)

## NORWAY

**Salitec AS**

PB 468,  
N-1327 Lysaker  
Tel.: +47 23 891015  
Fax: +47 92101005  
[mail@salitec.no](mailto:mail@salitec.no)  
[www.salitec.no](http://www.salitec.no)

## PORTUGAL

**Campal Inovacoes Ferroviarias Lda.**

**RAILWAY INSTRUMENTS ONLY**  
Lagoas Park, Edificio 7, 1° Piso Sul  
2740-244 Porto Salvo, Oeiras,  
Portugal  
Tel: +351 21 584 4348  
[campal@campal.pt](mailto:campal@campal.pt)  
[www.campal.pt](http://www.campal.pt)

## RUSSIA

**LLC "ALIANCE"**

Plekhanova St, 4A  
111123, Moscow, Russia  
Tel/Fax: +7 495 741 5915  
[info@stankialiance.ru](mailto:info@stankialiance.ru)  
[www.stankialiance.ru](http://www.stankialiance.ru)

## SOUTH KOREA

**PROSEN. CO., LTD**

M-1001, Songdo techno park IT  
center, 32, Songdogwahak-ro,  
Yeonsu-gu, Incheon, 21984,  
Republic of Korea  
Tel: +82-32-811-3457  
Fax: +82-32-232-7458  
[trade@prosen.co.kr](mailto:trade@prosen.co.kr)  
[www.prosen.co.kr](http://www.prosen.co.kr)

## SOUTH KOREA

### BS Holdings

B-201, Wonpogongwon 1ro,  
59 Danwon-gu, Ansan-si,  
Gyeonggi-do, 15455,  
Republic of Korea  
Tel: +82-31-411-5011  
Fax: +82-31-411-5015  
[bsh5011@hanmail.net](mailto:bsh5011@hanmail.net)  
[www.lasersolution.co.kr](http://www.lasersolution.co.kr)

## SWEDEN

### Latronix AB

Propellervägen 10,  
183 62 Täby, Sweden  
Tel: +46 08-446 48 30  
Fax: +46 08-446 48 39  
[sales@latronix.se](mailto:sales@latronix.se)  
[www.latronix.se](http://www.latronix.se)

## TURKEY

### TEKMA Mühendislik A.Ş.

Cevizli Mh. M. Kemal Cd.,  
Hukukçular Towers,  
A-Blok, No: 66-A/39  
Kartal – Istanbul  
Tel: +90 216 970 1318  
Tel: +90 850 840 2334  
[info@tekma.eu](mailto:info@tekma.eu)  
[www.tekma.eu](http://www.tekma.eu)

## USA, CANADA, MEXICO

### Acuity Products of Schmitt Industries, Inc.

2765 NW Nicolai Street  
Portland, OR, 97210, USA  
Tel: +1-503 227 7908  
Fax: +1 503 223 1258  
[sales@acuitylaser.com](mailto:sales@acuitylaser.com)  
[www.acuitylaser.com](http://www.acuitylaser.com)

## SPAIN

### IBERFLUID Instruments S.A.

C/ Botanica, 122,  
08908 L'Hospitalet de Llobregat,  
Barcelona, Spain  
Tel: +34 93 447 10 65  
Fax: +34 93 334 05 24  
[myct@iberfluid.com](mailto:myct@iberfluid.com)  
[www.iberfluid.com](http://www.iberfluid.com)

## TAIWAN

### Advantech Solution Co., Ltd.

Nano-Trend Technology Co., Ltd.  
No.365-6, Zhongshan Rd., Sanxia Dist.,  
New Taipei City 23741,  
Taiwan (R.O.C.)  
Tel: +886-2-8671-9560  
Fax: +886-2-8671-0084  
[nt@nano-trend.com](mailto:nt@nano-trend.com)  
[www.nano-trend.com](http://www.nano-trend.com)

## UKRAINE

### KODA

Frunze st, 22  
61002, Harkov, Ukraine  
Tel/Fax: +38 057 714 26 54  
[mail@koda.com.ua](mailto:mail@koda.com.ua)  
[www.koda.com.ua](http://www.koda.com.ua)

## SWITZERLAND

### ID&T GmbH

Gewerbestrasse 12/a,  
8132 Egg (Zurich), Switzerland  
Tel: +41 44 994 92 32  
Fax: +41 44 994 92 34  
[info@idtlaser.com](mailto:info@idtlaser.com)  
[www.idtlaser.com](http://www.idtlaser.com)

## THAILAND

### Advantech Solution Co., Ltd.

20/170 Motorway Rd.,  
Kwang Pravat, Khet Pravat,  
Bangkok, Thailand 10250  
Tel: +662-1848705  
Fax: +662-1848708  
[sales@advantechsolutions.com](mailto:sales@advantechsolutions.com)  
[bundit.s@advantechsolutions.com](mailto:bundit.s@advantechsolutions.com)  
[www.advantechsolutions.com](http://www.advantechsolutions.com)

## UNITED KINGDOM, IRELAND

### Ixthus Instrumentation Ltd

The Stables, Williams' Barns  
Tiffeld road, Towcester, Northants, UK  
Tel: +44 1327 353437  
Fax: +44 1327 353564  
[www.ixthus.co.uk](http://www.ixthus.co.uk)  
[info@ixthus.co.uk](mailto:info@ixthus.co.uk)

## SWEDEN

### BLConsult

Ryssbält 294,  
95 291 Kalix, Sweden  
Mobile: +46 70 663 19 25  
[info@blconsult.se](mailto:info@blconsult.se)  
[www.blconsult.se](http://www.blconsult.se)

## TURKEY

### MAK Elektronik Malzeme Analiz ve Kalite Kontrol Cihazları Dis Tic. Ltd. Sti.

Cenap Sahabettin Sokak, No:39,  
34718 Kosuyolu – Kadikoy / Istanbul  
- Turkey  
Tel: +90 216 402 1034  
Fax: +90 216 402 1035  
[ulastac@metalografi.net](mailto:ulastac@metalografi.net)  
[www.makelektronik.com.tr](http://www.makelektronik.com.tr)

## USA, CANADA, MEXICO

### International Electronic Machines Corporation

#### RAILWAY INSTRUMENTS ONLY

850 River Street  
Troy, NY 12180, USA  
Tel: +1 518 268 1636  
Fax: +1 518 268 1639  
[railway\\_marketing@iem.net](mailto:railway_marketing@iem.net)  
[www.iem.net](http://www.iem.net)



## **RIFTEK LLC**

22-311, Logoisky tract,  
220090, Minsk, Republic of Belarus

Tel/Fax: +375 17 357-36-57  
Email: [info@riftek.com](mailto:info@riftek.com)  
Site: [www.riftek.com](http://www.riftek.com)